


DRIVER TRANSFORMER
70500298
DC 298

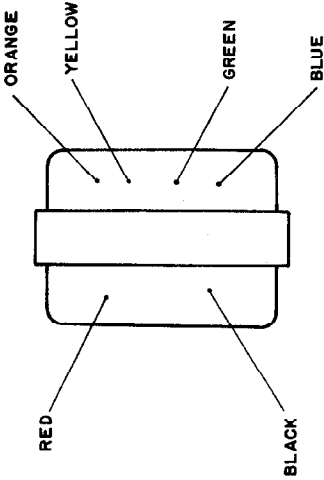

POTENTIOMETERS

71190013 = 50K VPC LIN
71190015 = 250K VPC LIN
71190016 = 10K VPC LIN

NOTE


ALL TRANSISTORS SFS 953 UNLESS NOTED
ALL RESISTORS 1/2W UNLESS NOTED
ALL CAPACITORS IN MFD UNLESS NOTED
ALL DIODES 1A/200V PIV UNLESS NOTED



SEMI-CONDUCTOR CROSS-REFERENCE LIST

953 — 2N 3391
4249 — 2N 4249
558 — 2N 5458
EP-430 — TIP 31C
62792 — 2N 3055

EF 710 X-FORMER REPLACED BY 70518712

PACER A-SERIES
P/N 81501235




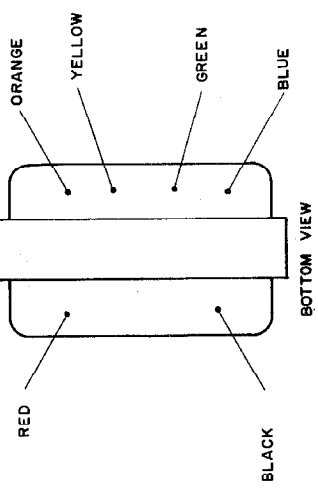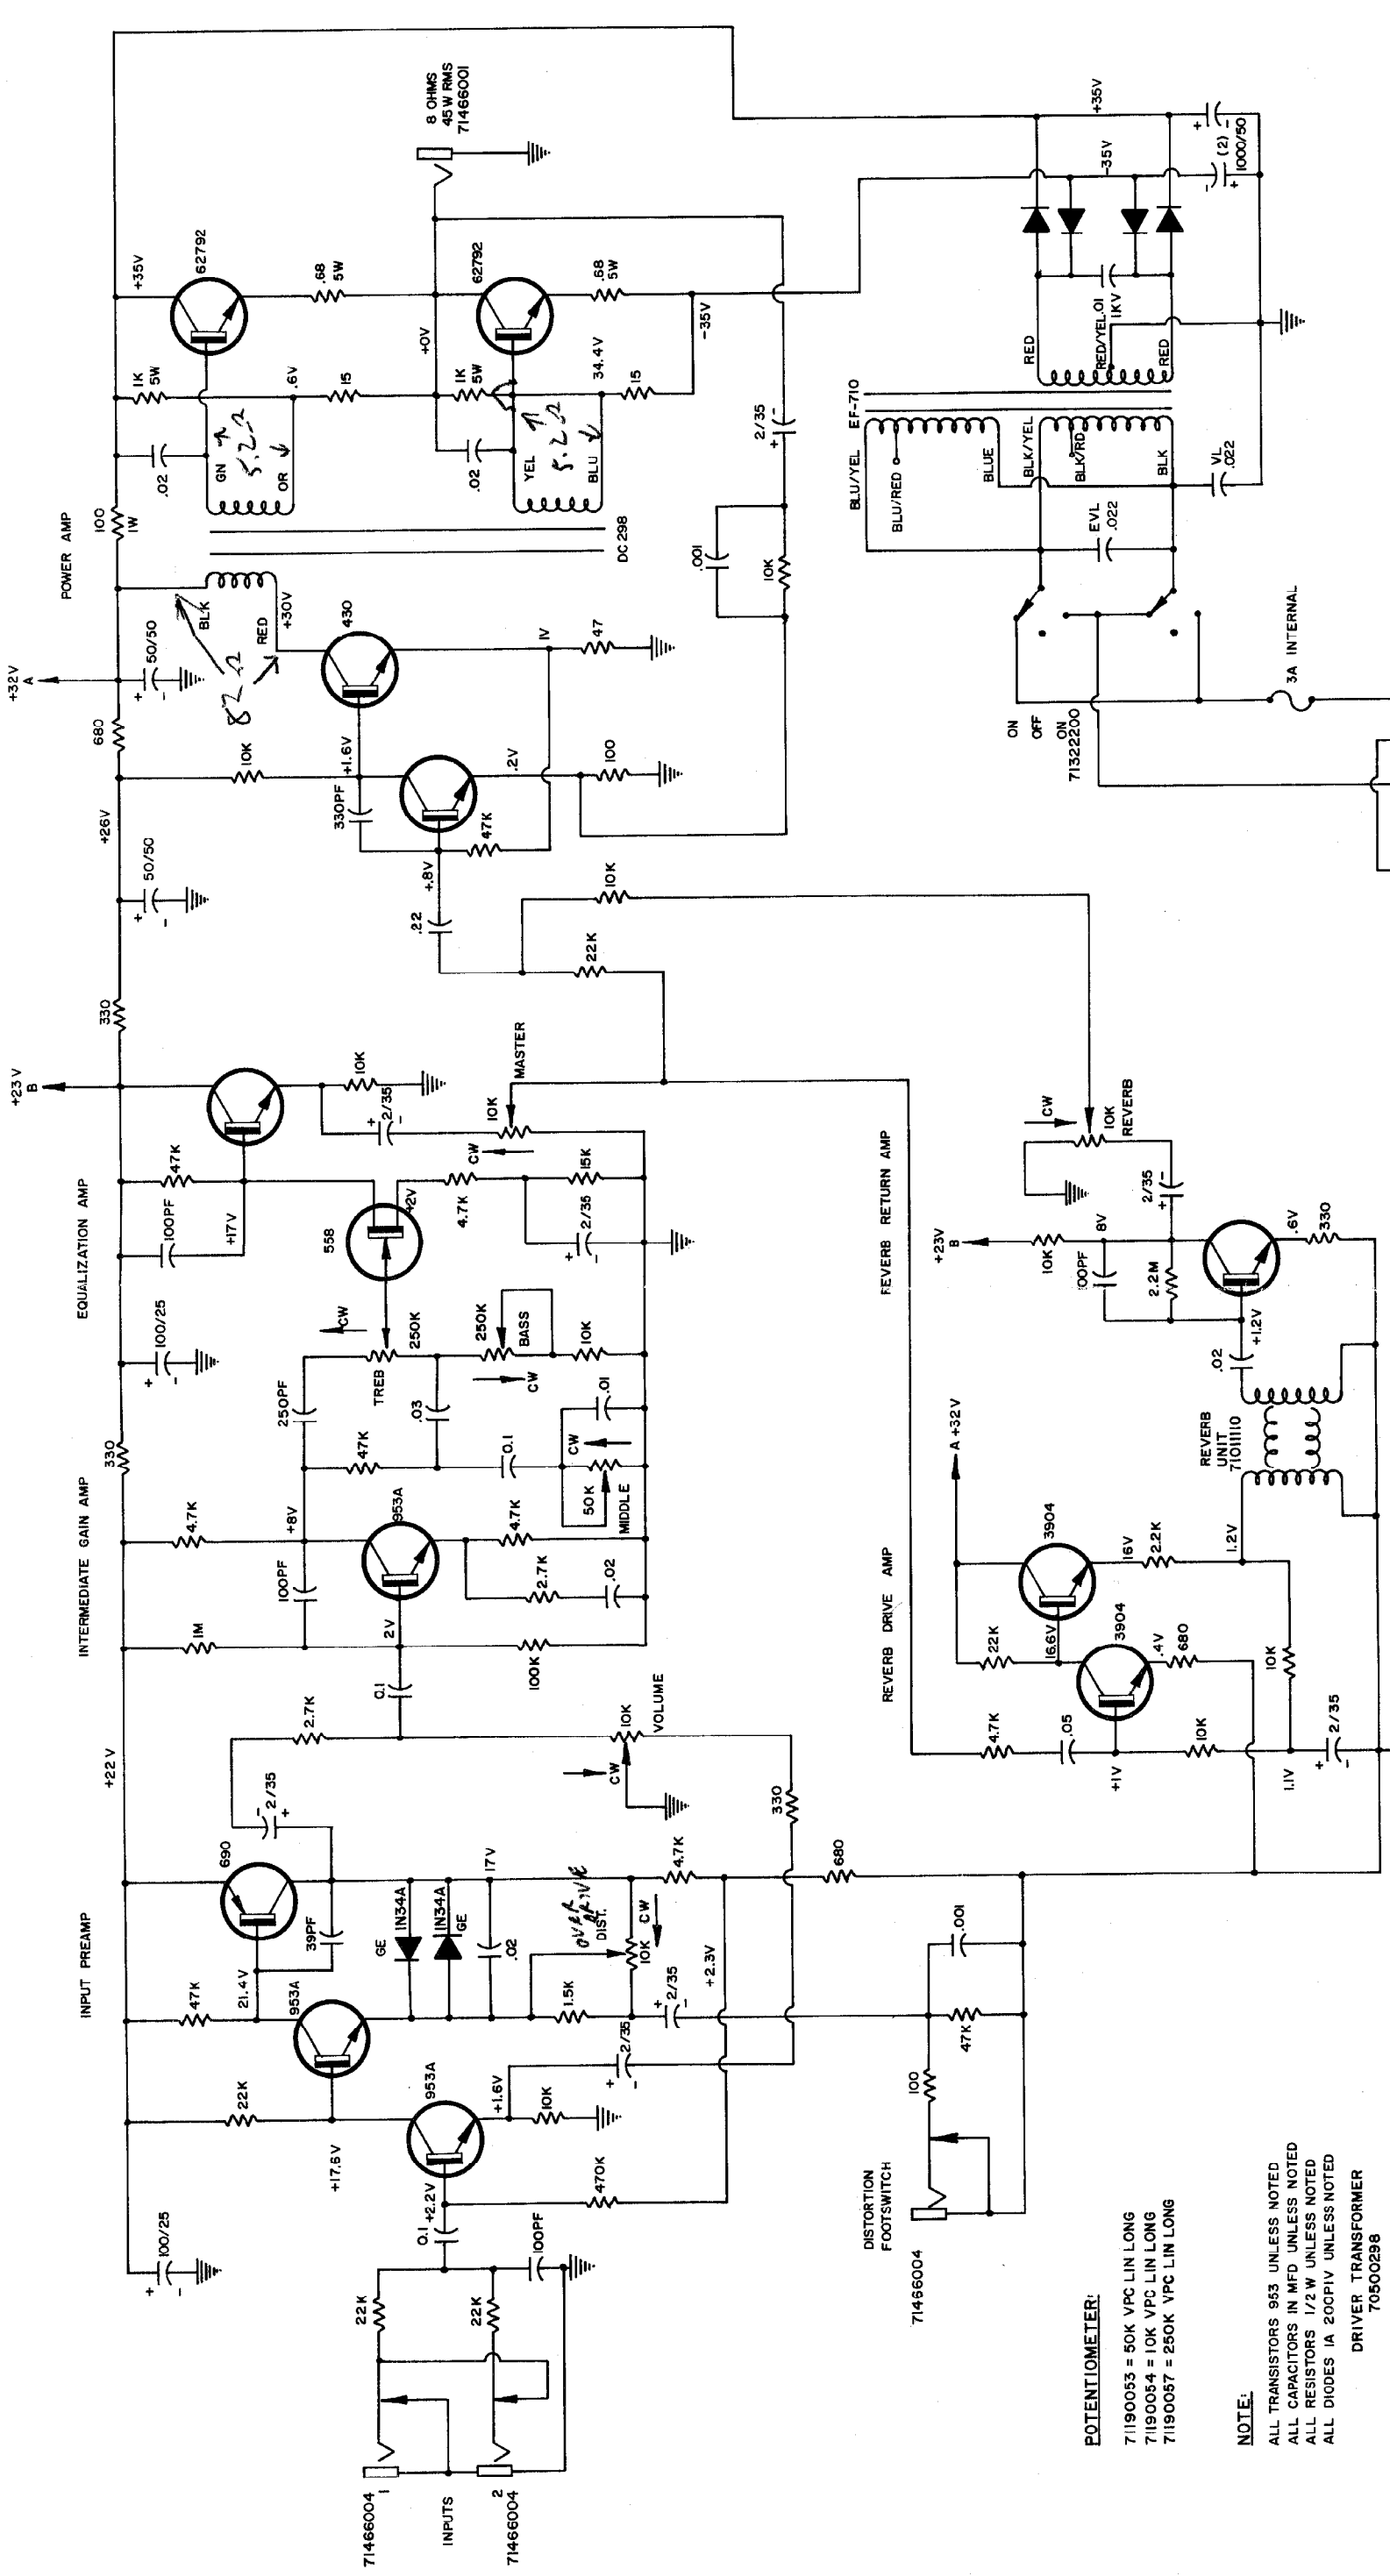

- SEMI-CONDUCTOR CROSS-REFERENCE LIST:
- 953 — 2N3391
 - 690 — 2N4249
 - 558 — 2N5456
 - 3904 — 2N3904
 - EP-430 — TIP 31C
 - 62792 — 2N3055

EF710 X-FORMER REPLACED BY 70518712

PRIMARY CONNECTIONS FOR EXPORT MODELS 240V 50/60 HZ



POTENTIOMETER:
71190053 = 50K VPC LIN LONG
71190054 = 10K VPC LIN LONG
71190057 = 250K VPC LIN LONG

NOTE:
ALL TRANSISTORS 953 UNLESS NOTED
ALL CAPACITORS IN MFD UNLESS NOTED
ALL RESISTORS 1/2 W UNLESS NOTED
ALL DIODES 1A 200PIV UNLESS NOTED

DRIVER TRANSFORMER
70500298

DISTORTION FOOTSWITCH
71456004

PACER B-SERIES
P/N 81501235