



BASING DIAGRAMS BOTTOM VIEWS




NOTES:
 Δ ADJUST FOR 50% V AT + SIDE OF C13 FOR SYMMETRICAL CLIPPING.
 Δ ADJUST FOR MAXIMUM REVERB EFFECT WITHOUT FEEDBACK OR EXCESSIVE HUM AND NOISE.
 Δ ADJUST FOR 10B DROP WITH INTENSITY CONTROL FULLY COUNTERCLOCKWISE. ADJUSTMENT MADE 100B BELOW CLIPPING AT 1KC. TREMOLO OFF AT FOOT SWITCH.

POWER AMPLIFIER

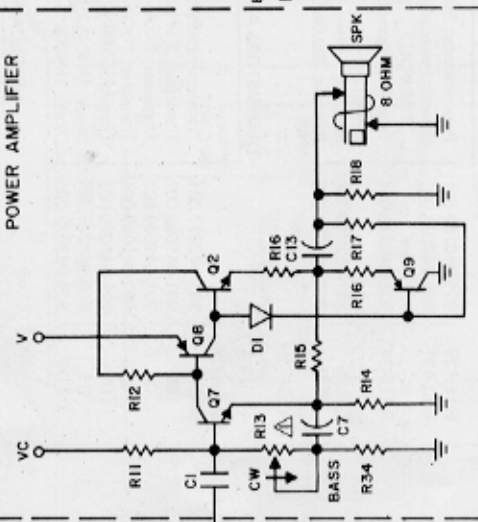


POWER SUPPLY

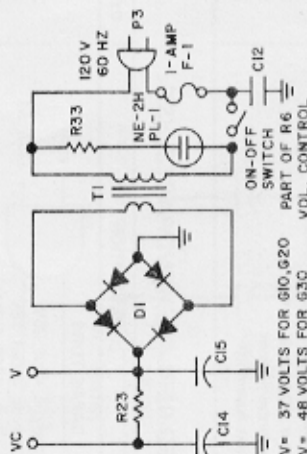

G30

Q7-MPSA09
Q8-BC161
Q9-2N2148


TREMOLO



G20

Q7-TIS98
Q8-BC160
Q9-2N2147


REVERBERATION (USED ON G20, G30 ONLY)

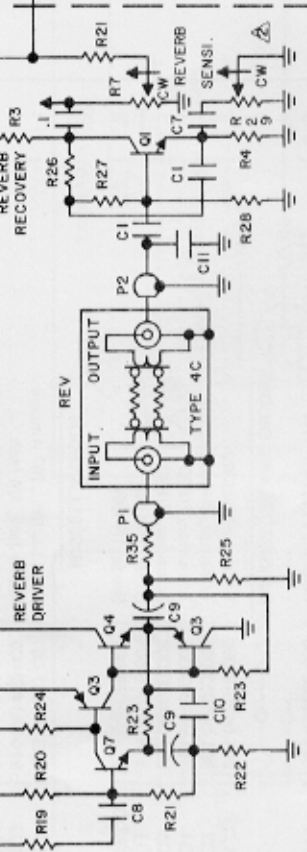

G10

Q7-TIS98
Q8-BC160
Q9-2N2147

PREAMPLIFIER

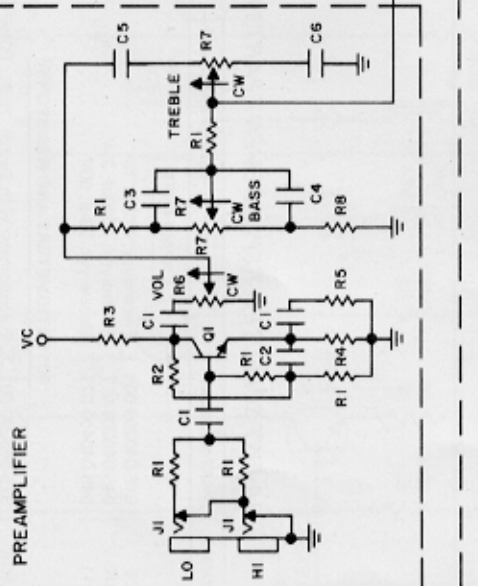

G10, G20, G30

Q1-TIS98
Q2-2N3055
Q3-MPSA55
Q4-MPSA05
Q5-MPF161
Q6-BC109

NOTES:
 UNLESS OTHERWISE SPECIFIED:
 ALL RESISTOR VALUES ARE IN OHMS, ±5%, 1/2W,
 ALL CAPACITOR VALUES ARE IN MFD.