


■ A-912MK2

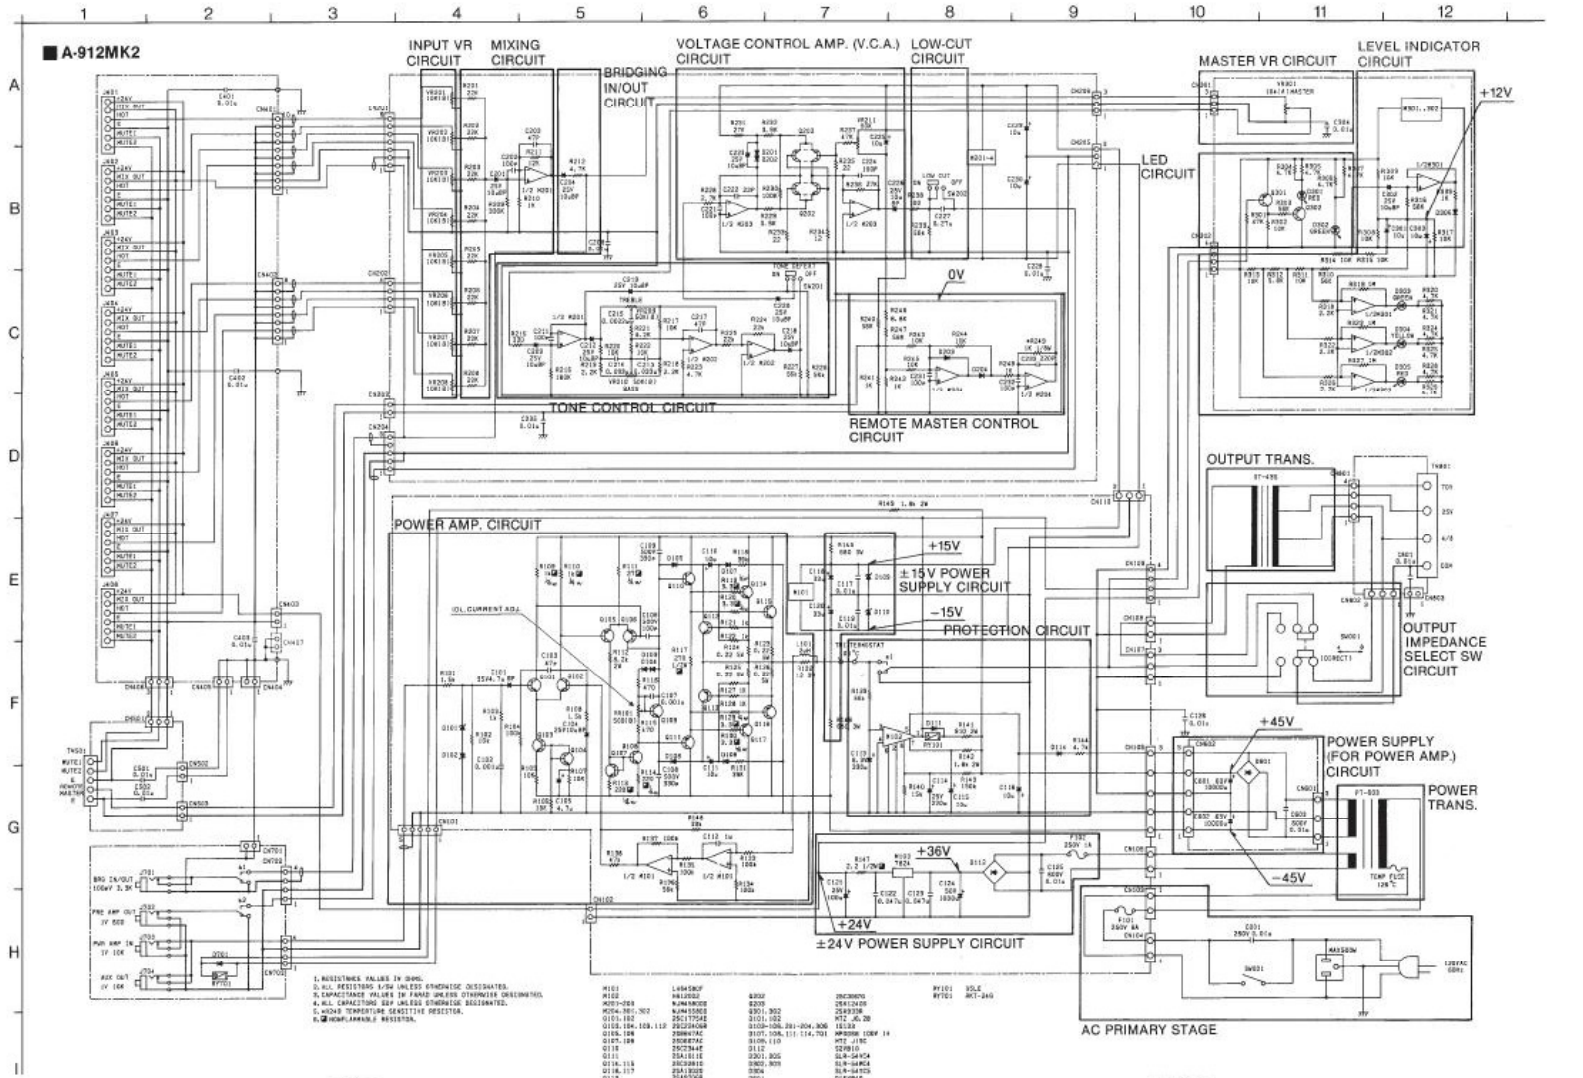

1. RESISTOR VALUES IN OHMS.
2. ALL RESISTORS 1/4W UNLESS OTHERWISE DESIGNATED.
3. CAPACITOR VALUES IN FARADS UNLESS OTHERWISE DESIGNATED.
4. ALL CAPACITORS 50V UNLESS OTHERWISE DESIGNATED.
5. WINDING TOLERANCE SENSITIVE RESISTOR.
6. WOUND COMPONENT RESISTOR.

R101	L94850P	R202	2C2000	R210	65L
R102	441200P	R203	2C2000	R211	2C2000
R103	441200P	R204	2C2000	R212	2C2000
R104	441200P	R205	2C2000	R213	2C2000
R105	441200P	R206	2C2000	R214	2C2000
R106	441200P	R207	2C2000	R215	2C2000
R107	441200P	R208	2C2000	R216	2C2000
R108	441200P	R209	2C2000	R217	2C2000
R109	441200P	R210	2C2000		
R110	441200P	R211	2C2000		
R111	441200P	R212	2C2000		
R112	441200P	R213	2C2000		
R113	441200P	R214	2C2000		
R114	441200P	R215	2C2000		
R115	441200P	R216	2C2000		
R116	441200P	R217	2C2000		
R117	441200P				
R118	441200P				
R119	441200P				
R120	441200P				