

**NOTES:**

\*1 : PART CAN BE REPLACED WITH 25A1084 E

AC VOLTAGE 1000 HZ, MEASURED WITH UTUM


DC VOLTAGE MEASURED WITH VOLTMETER 100kOHM/V

FADER IN RATED POSITION ( 0dB )  
ADDITIONAL GAIN WITH FADER IN MAX. POSITION

SAFETY COMPONENT  
(MUST BE REPLACED BY ORIGINAL PART)

**RATED CONDITIONS:**

GAIN POTS MIN. OR MAX.  
ALL POTS IN CENTER-POSITION  
ALL FADERS AT 0dB  
MASTER-FADER-L/R AT +6dB

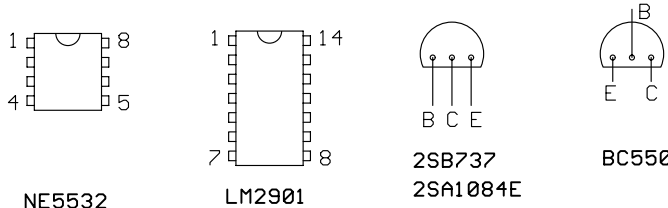

ALTERATIONS RESERVED!				Last modified 07.04.2004 13:08:24		81357C		81357	
				Last plotted 08.04.2004 14:02:39					
				DATE		NAME			
				DSB'D 10.2003		Lang F.			
				CHK'D		CIRCUIT DIAGRAM		3/3	
				APP'D					
						362 338			
				EVI AUDIO		PM1000/PM1600 -2		2-	
ISSUE		REVISION		DATE		NAME			