

Fishman Transducers, Inc.


Loudbox 100 - Woofer Amp Bias Instructions

8/25/05

JE

Instructions:


1. Remove jumper JP4 and insert DC current meter.
2. Power ON amplifier.
3. Adjust trim potentiometer VR3 so that meter reads between 10 - 20mA.
4. Power OFF amplifier.
5. Remove DC current meter and replace jumper JP4.

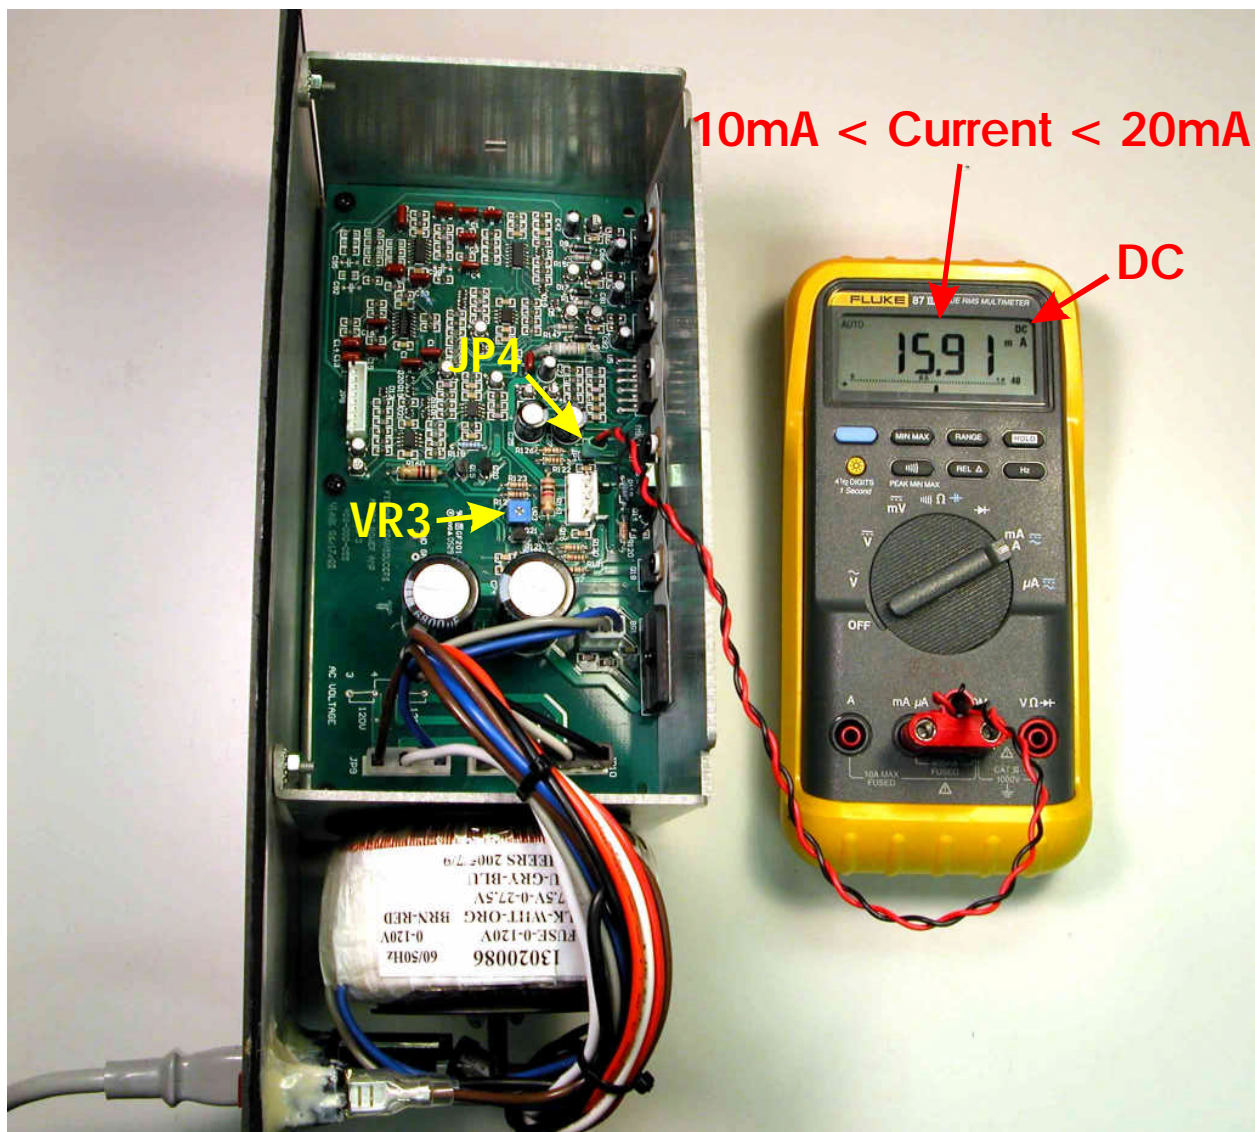


See following page for additional details.

Additional Details:


VR3 and JP4 Close

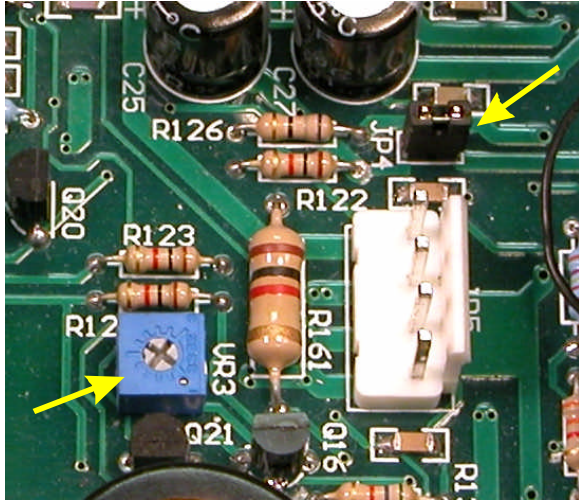

Jumper JP4 Removal

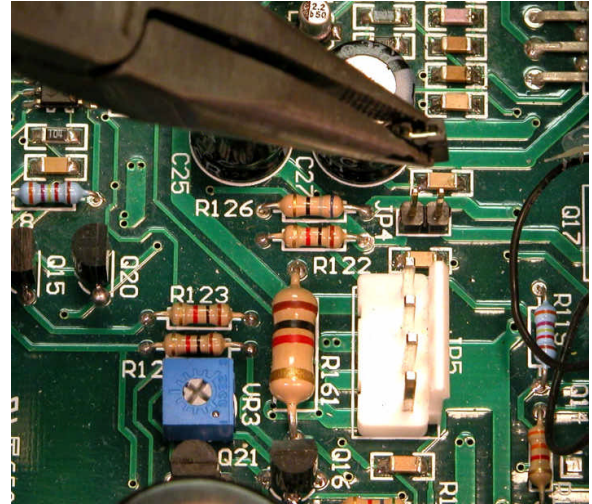

Bias Adjustment with Current Meter

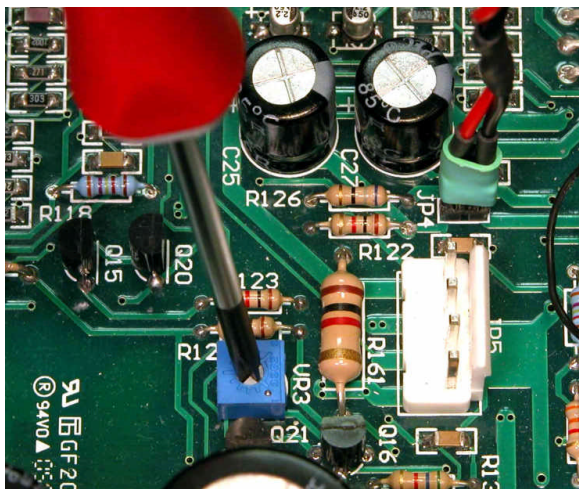

Current Meter Connector

