NOTES

1) CAUTION: SHOCK HAZARD!!
   THIS UNIT CONTAINS HAZARDOUS VOLTAGE. DISCONNECT POWER AND BE SURE POWER SUPPLY IS DISCHARGED BEFORE TOUCHING INTERNAL PARTS.
2) UNLESS NOTED, RESISTOR VALUES IN OHMS, 1/4W-5% TOL. CAPACITOR VALUES IN MICROFARADS, 50V-10% TOL.
3) VOLTAGES ARE MEASURED WITH 1 MEGOHM OSCILLOSCOPE AND 10 MEGOHM DIGITAL VOLTMETER.
4) CIRCUIT GROUND ⏚ DIRTY GROUND ⏚ CHASSIS GROUND
5) GOOP C5 PER USUAL PRACTICE.



(SPEAKER OUTPUT)



(AC TERMINATION)

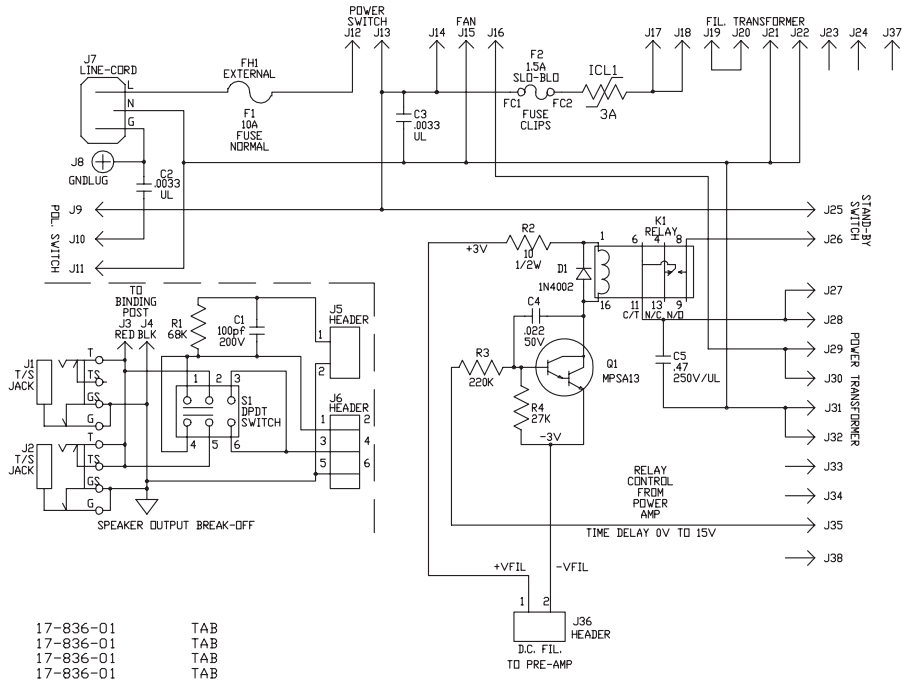

ARTWORK REV. 6

DESIGNATOR	PART#	DESCRIPTION	
C1	10A101-21	100pf	200V
C2	10-332-01	0.0033	UL
C3	10-332-01	0.0033	UL
C4	10A223-01	0.022	50V
C5	10-474-25	0.47	250V/UL
D1	21A402-01	1N4002	
FC1	23-926-02	FUSE	CLIP
FC2	23-926-02	FUSE	CLIP
FH1	23-346-01	FUSE	HOLDER
(8) ICL1	73-501-03	3A INRUSH LIMITER	
J1	39-116-01	T/S	JACK
J2	39-116-01	T/S	JACK
J3	17-836-01	TAB	
J4	17-836-01	TAB	
J5	17-310-02	2PIN	HEADER
J6	17-195-06	6PIN	HEADER
J7	17-604-01	LINE-CORD	CONNECTOR
J8	51-149-01	GNDLUG	
J9	17-894-01	TAB	
J10	17-894-01	TAB	
J11	17-894-01	TAB	
J12	17-836-01	TAB	
J13	17-836-01	TAB	
J14	17-894-01	TAB	
J15	17-894-01	TAB	
J16	17-894-01	TAB	
J17	17-894-01	TAB	
J18	17-894-01	TAB	
J19	17-894-01	TAB	
J20	17-894-01	TAB	
J21	17-894-01	TAB	
J22	17-894-01	TAB	
J23	17-894-01	TAB	
J24	17-894-01	TAB	
J25	17-836-01	TAB	
J26	17-836-01	TAB	
J27	17-836-01	TAB	
J28	17-836-01	TAB	
J29	17-836-01	TAB	
J30	17-836-01	TAB	
J31	17-836-01	TAB	
J32	17-836-01	TAB	
J33	17-836-01	TAB	
J34	17-836-01	TAB	
J35	17-836-01	TAB	
J36	17-310-02	2PIN	HEADER
(8) J37	17-894-01	TAB	
(8) J38	17-836-01	TAB	
K1	82-505-01	RELAY	
Q1	96-013-01	MPSA13	
R1	76-683-01	68K	
R2	77-100-01	10	1/2W
R3	76-224-01	220K	
R4	76-273-01	27K	
S1	88-214-02	SWITCH	
F1	23-310-01	10A FUSE	NORMAL
F2	23-308-05	1.5A FUSE	SLO-BLO
PCB1	06A319-03	PC BRD.	

MISC. HARDWARE

(2)	30-638-53	SCREW
(2)	30-700-01	NUT
(1)	23-346-11	FUSE HOLDER CAP

REV	DATE	BY	CHK'D	DESCRIPTION
9				
(8)	11/13/97	SWR		ADDED ICL1, J37, & J38. PER ECO #970682.
(7)	11/04/96	SWR		CHANGED P/N FOR FC1 & FC2 & LABEL FOR F2. PER ECO #960445.
6	05/07/96	LMA	G. M.	ADDED C5 PER E960093
(5)	11/08/95	DMM		CHANGED 39-116-51 TO 39-116-01 PER E950348
(4)	03/22/95	REM		R1 FROM 33K TO 68K RESISTOR.
(3)	04/11/94	BC		CHANGED F1 FROM 15A TO 10A FUSE (23-315-01 TO 23-310-01) PER ECO E101
(2)	04/07/94	SWR		CHANGED C2 TO 10-332-01 .0033 UL. PER ECO #E126.
1	08/09/93	SWR		CHANGED P/N FOR PARTS J1 & J2.

SIGNATURES:		DATE:
DRAWN:	ERW	03/11/93
CHK'D:	GM	8/9/93
APP'D:	GM	8/9/93
ORIGINAL ISSUED:		8/9/93
PLOT DATE:		11/13/97
PLOT TIME:		08:19:22
FILE NAME:		31903p8_

11880 BORMAN DR.
ST. LOUIS, MISSOURI
63146

PROJECT NAME: SVT-2 PRO

DRAWING NAME: AC-TERM BRD.

DRAWING NO. 07P319-03 REV. 8

SCALE: 1:1 SHEET: 1 OF 1