

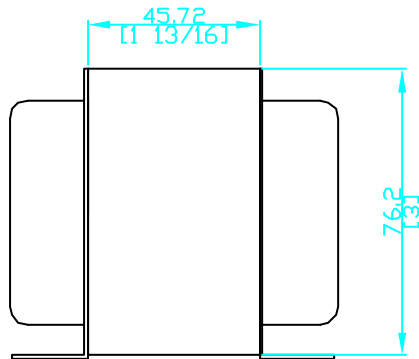


GIBSON Super Goldtone GA30RV Output Transformer

73-TRAN-30W-0P

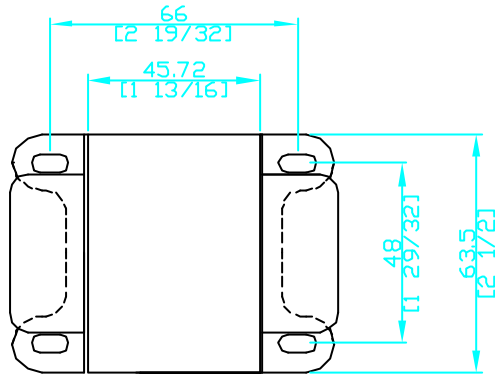

X MOUNT

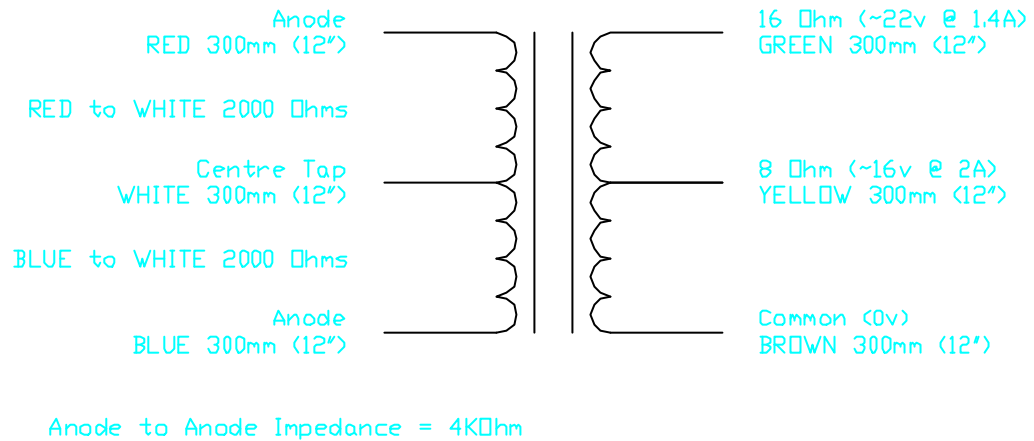

NOTES:

- 1) X Mount Output Transformer for use in high quality 30 watt RMS Class A Tube guitar amplifier/combo.
- 2) Output stage using 4 x EL84's in push/pull cathode bias. Volts on anode = ~360V. Quiescent current = ~170mA
- 3) Frequency response approx. 40Hz - 15KHz (please advise otherwise)
- 4) All lead lengths measured from point of exit from transformer shroud.
- 5) All flying leads to come out same shroud.
- 6) Dimensions = mm (Inches) all approximate.
- 7) Any changes to specifications need to be notified to Paul Stevens ASAP for approval and to update other relevant chassis drawings.

CHANGE: .	
.	
TRACE ELLIOT LIMITED BLACKWATER TRADING ESTATE MALDON ESSEX CM9 4GG UNITED KINGDOM TEL: +44 (0) 1621 851851 FAX: +44 (0) 1621 851932	DRAWN: Paul Stevens paul.stevens@gibson.com DATE: 19 March 2002 ISSUE: 2 DRG NO. TX00018
TITLE: Gibson Goldtone 30W Output Transformer 73-TRAN-30W-0P	