


- POTENTIOMETERS:
- 2 - 71190053 = 50K VPCLIN
 - 1 - 71190054 = 10K VPCLIN
 - 2 - 71190057 = 250K VPCLIN

TEST CONDITIONS:
 MASTER GAIN - FULL
 ALL TONE CONTROLS AT 12:00
 GAIN ADJUST FOR 10.5VRMS AT THE OUTPUT

BACKSTAGE® 30

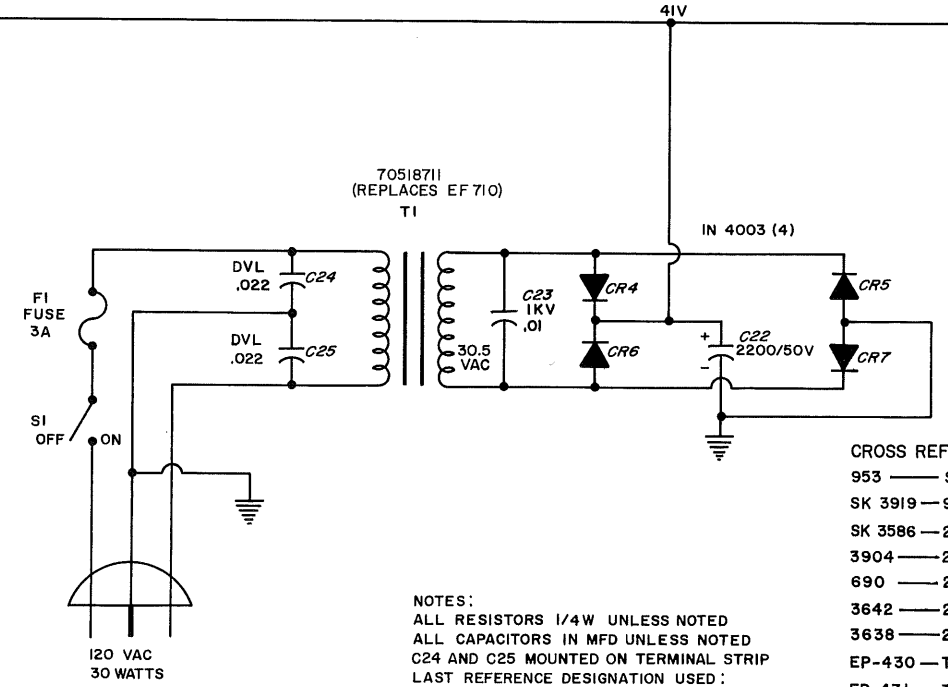

NOTES:
 ALL RESISTORS 1/4W UNLESS NOTED
 ALL CAPACITORS IN MFD UNLESS NOTED
 C24 AND C25 MOUNTED ON TERMINAL STRIP
 LAST REFERENCE DESIGNATION USED:
 C - 25
 R - 36
 Q - 14
 CR - 7
 ALL DC VOLTAGE MEASUREMENTS MADE
 WITH FULL 120VAC SUPPLY. NO SIGNAL
 APPLIED, 8 OHM LOAD CONNECTED.
 * AT IDLE, INTO 8 OHMS

- CROSS REFERENCE LIST
- 953 — SK 3919, 2N 3391
 - SK 3919 — 953, 2N 3391
 - SK 3586 — 2N 5951
 - 3904 — 2N 3904
 - 690 — 2N 4249
 - 3642 — 2N 3642
 - 3638 — 2N 3638
 - EP-430 — TIP 31C
 - EP-431 — TIP 30C

PEAVEY® ELECTRONICS CORP. MERIDIAN MS	
DRAWN BY <i>[Signature]</i>	DATE 6-23-77
CK. BY J.A.K.	8-1-77
APPR. BY <i>[Signature]</i>	