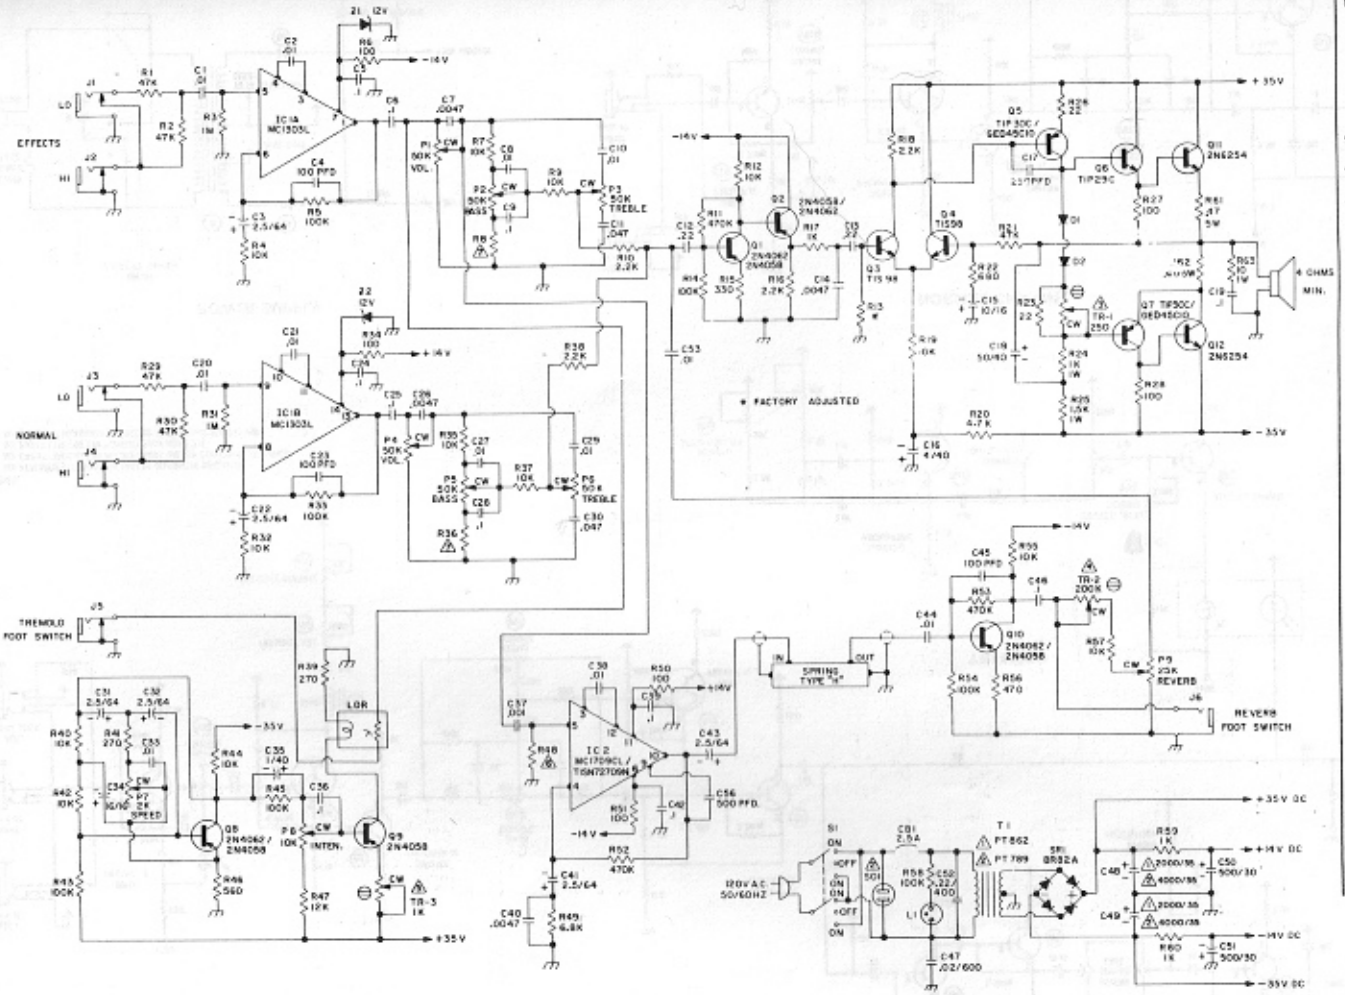

NOTES :

1. RESISTANCE VALUES IN OHMS AND 1/2 WATT 5% , UNLESS NOTED OTHERWISE.
2. ALL CAPACITORS ARE RATED IN MFD AND AT 100V, UNLESS NOTED OTHERWISE.

⊖ INDICATES SCREW DRIVER ADJ.

△ USED ONLY ON GIBSON 50 MODEL.

△ USED ONLY ON GIBSON 60,70& 80 MODELS.

△ ADJ. TR-1 (BIAS POT.) AT 120 V LINE, 4 OHM LOAD, 5 MV ACROSS R61 & R62.

△ ADJ. TR-2 (REVERB SENSITIVITY) FOR MAXIMUM REVERB WITHOUT FEED BACK.

△ ADJ. TR-3 (TREMOLO SENSITIVITY) TILL TREMOLO JUST STOPS WITH INTENSITY CONTROL OFF.

△ 470K ON GIBSON 60,70 & 80 MODELS. 1 MEG ON GIBSON 50 MODEL.

△ 470 ON GIBSON 50 MODEL. 1K ON GIBSON 60,70 & 80 MODELS.

BOTTOM VIEWS





TOP VIEWS