

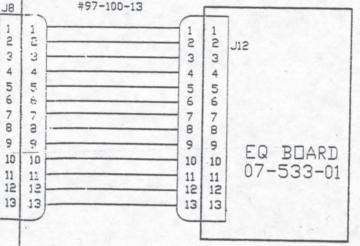


* SEE EXPORT WIRING CONFIGURATION.
** NOT REQUIRED FOR 220V & 240V CONFIGURATIONS.
SEE EXPORT WIRING CONFIGURATION.



EXPORT WIRING

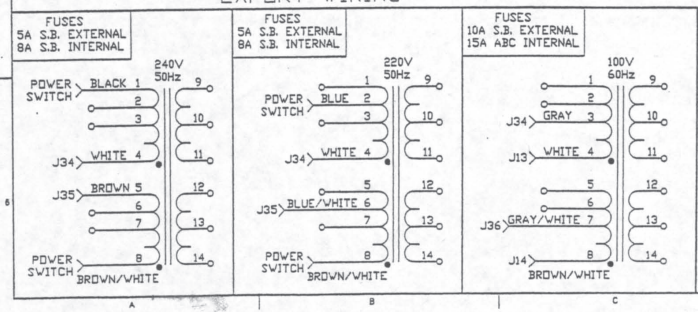

CAUTION:
THIS SCHEMATIC IS PROVIDED FOR USE BY QUALIFIED PERSONNEL.
TO AVOID RISK OF ELECTRIC SHOCK, REFER SERVICING TO QUALIFIED SERVICE PERSONNEL. DO NOT PERFORM ANY SERVICING BEYOND THAT EXPLAINED IN THE OPERATING INSTRUCTIONS.

- NOTES
- 1) CAUTION: SHOCK HAZARD!! THIS UNIT CONTAINS HAZARDOUS VOLTAGE. DISCONNECT POWER AND BE SURE POWER SUPPLY IS DISCHARGED BEFORE TOUCHING INTERNAL PARTS.
 - 2) UNLESS NOTED, RESISTOR VALUES IN OHMS, 1/4W-5% TOL. CAPACITOR VALUES IN MICROFARADS, 50V-10% TOL.
 - 3) VOLTAGES ARE MEASURED WITH 1 MEGOHM OSCILLOSCOPE AND 10 MEGOHM DIGITAL VOLTMETER.
 - 4) CIRCUIT GROUND → SWITCH GROUND → CHASSIS GROUND →

SIGNATURES:		DATE:	1880 BOWMAN ST. LOUIS, MISS 63146
DRAWN: S.RADER		3/1/81	
CHK'D:	PROJECT NAME:		SVT III
APP'D: [Signature]	DRAWING NAME:		WIRING DIAGRAM
ORIGINAL ISSUED:	PLOT DATE:		05/07/81
PLOT TIME:	14:03:47	DRAWING NO.:	16W413-0
FILE NAME:	18W41301	SCALE:	1:1
		SHEET:	1 OF 1