KITTY HAWK JUNIOR SERIES I

© 204 3/28/1983

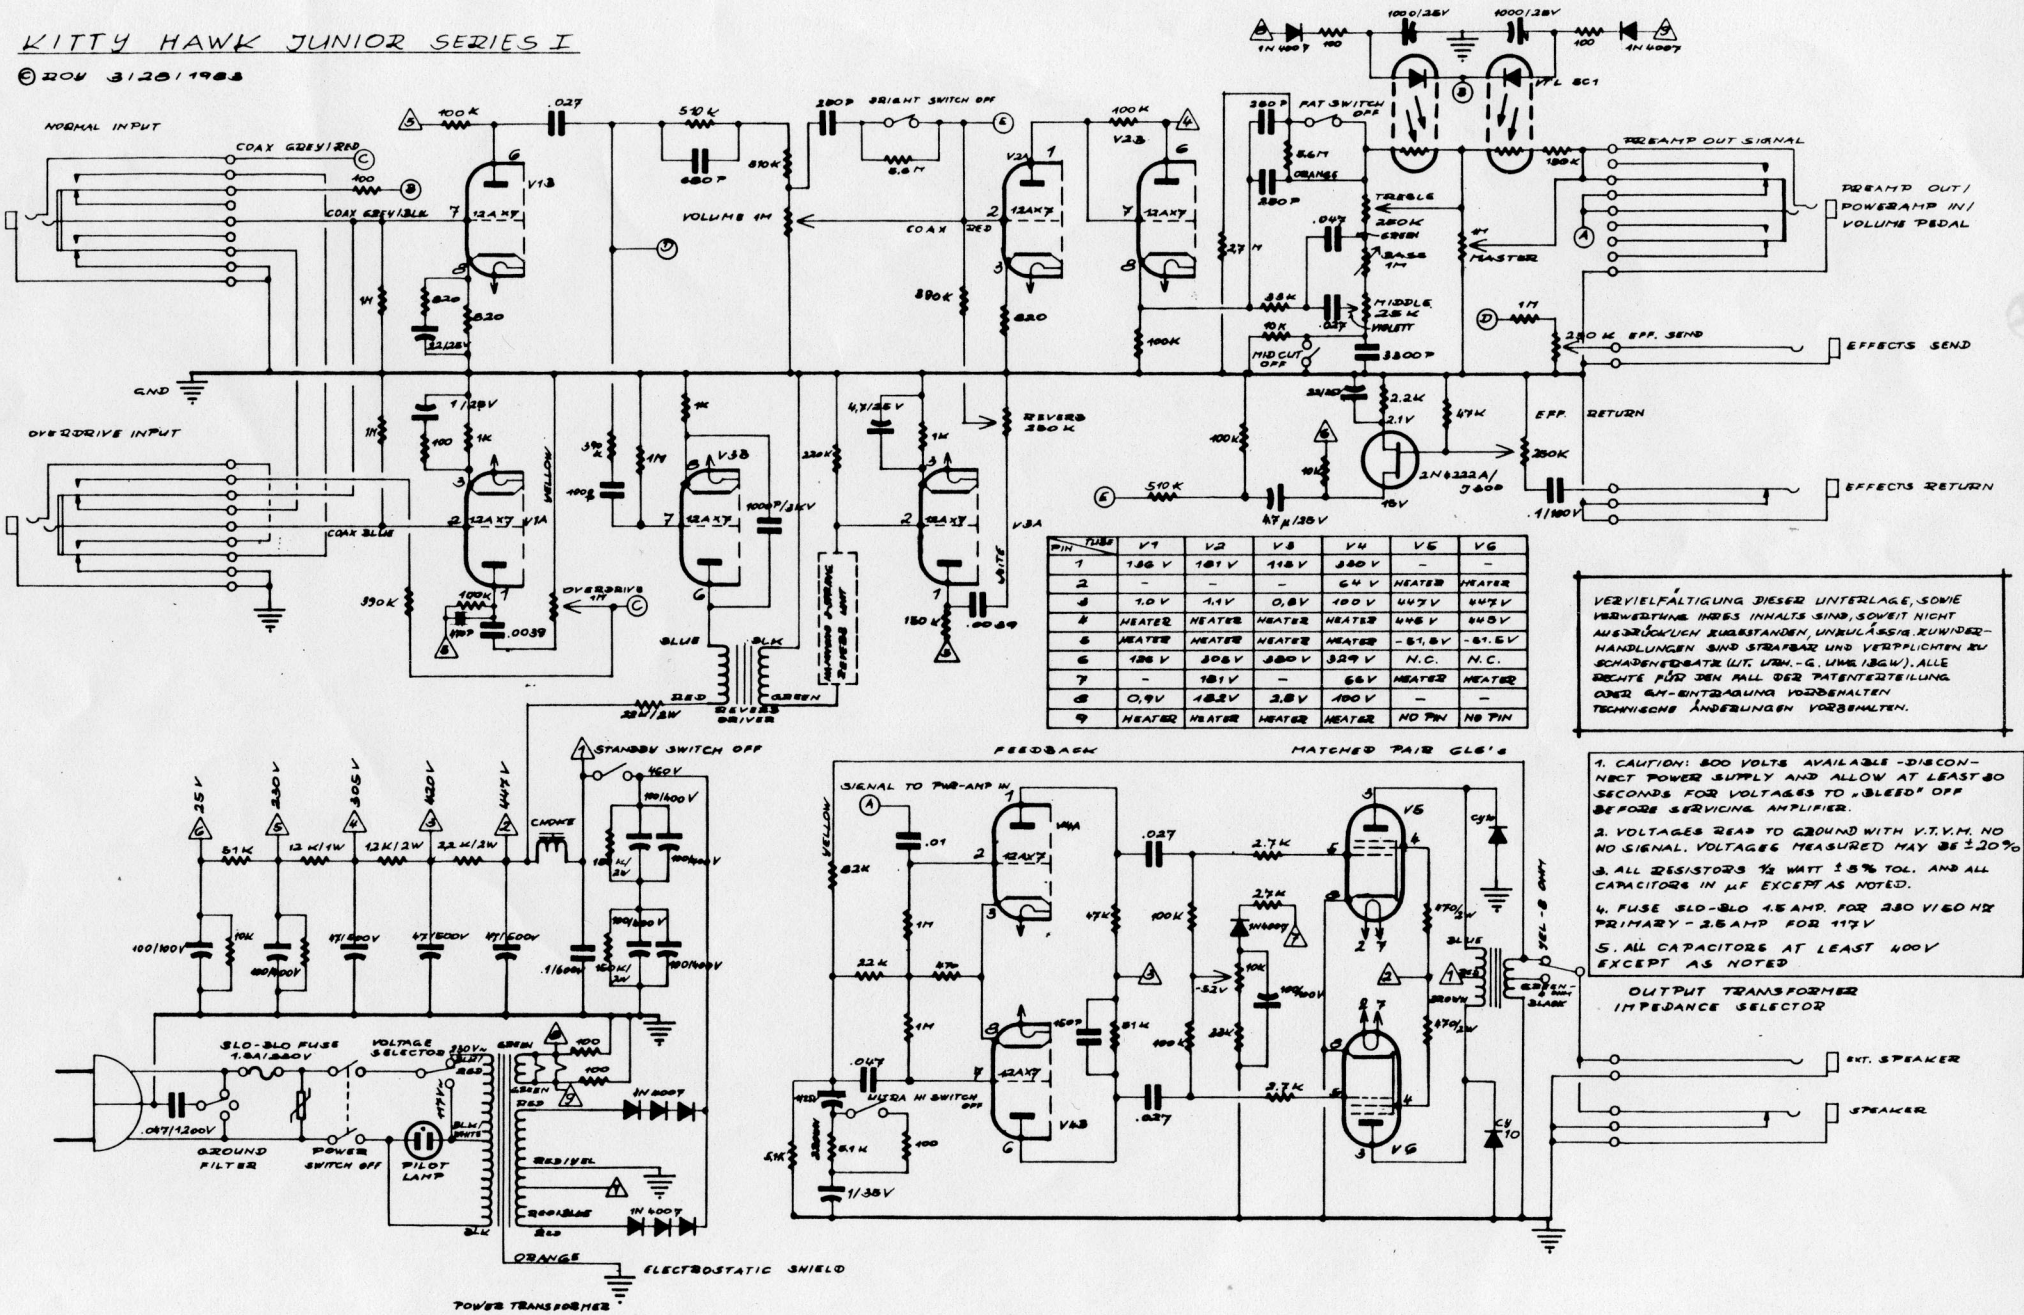

PIN / TUBE	V1	V2	V3	V4	V5	V6
1	1.36 V	1.81 V	1.15 V	380 V	–	–
2	–	–	–	64 V	HEATER	HEATER
3	1.0 V	1.1 V	0,8 V	100 V	447 V	447 V
4	HEATER	HEATER	HEATER	HEATER	445 V	445 V
5	HEATER	HEATER	HEATER	HEATER	-51,5 V	-51,5 V
6	126 V	308 V	380 V	329 V	N.C.	N.C.
7	–	181 V	–	66 V	HEATER	HEATER
8	0,9 V	1.82 V	2,8 V	100 V	–	–
9	HEATER	HEATER	HEATER	HEATER	NO PIN	NO PIN

VERVIELFÄLTIGUNG DIESER UNTERLAGE, SOWIE VERWERTUNG IHRES INHALTS SIND, SOWEIT NICHT AUSDRÜCKLICH ZUGESTANDEN, UNZULÄSSIG. ZUWIDERHANDLUNGEN SIND STRAFBAR UND VERPFLICHTEN ZU SCHADENERSATZ (LIT. URH.-G. UWG. BGW). ALLE RECHTE FÜR DEN FALL DER PATENTERTEILUNG ODER GM-EINTRAGUNG VORBEHALTEN TECHNISCHE ÄNDERUNGEN VORBEHALTEN.

1. CAUTION: 800 VOLTS AVAILABLE - DISCONNECT POWER SUPPLY AND ALLOW AT LEAST 30 SECONDS FOR VOLTAGES TO „BLEED" OFF BEFORE SERVICING AMPLIFIER.
2. VOLTAGES READ TO GROUND WITH V.T.V.M. NO NO SIGNAL. VOLTAGES MEASURED MAY BE ± 20%
3. ALL RESISTORS ½ WATT ± 5% TOL. AND ALL CAPACITORS IN µF EXCEPT AS NOTED.
4. FUSE SLO-BLO 1.6 AMP. FOR 230 V/60 Hz PRIMARY - 2.5 AMP FOR 117 V
5. ALL CAPACITORS AT LEAST 400 V EXCEPT AS NOTED