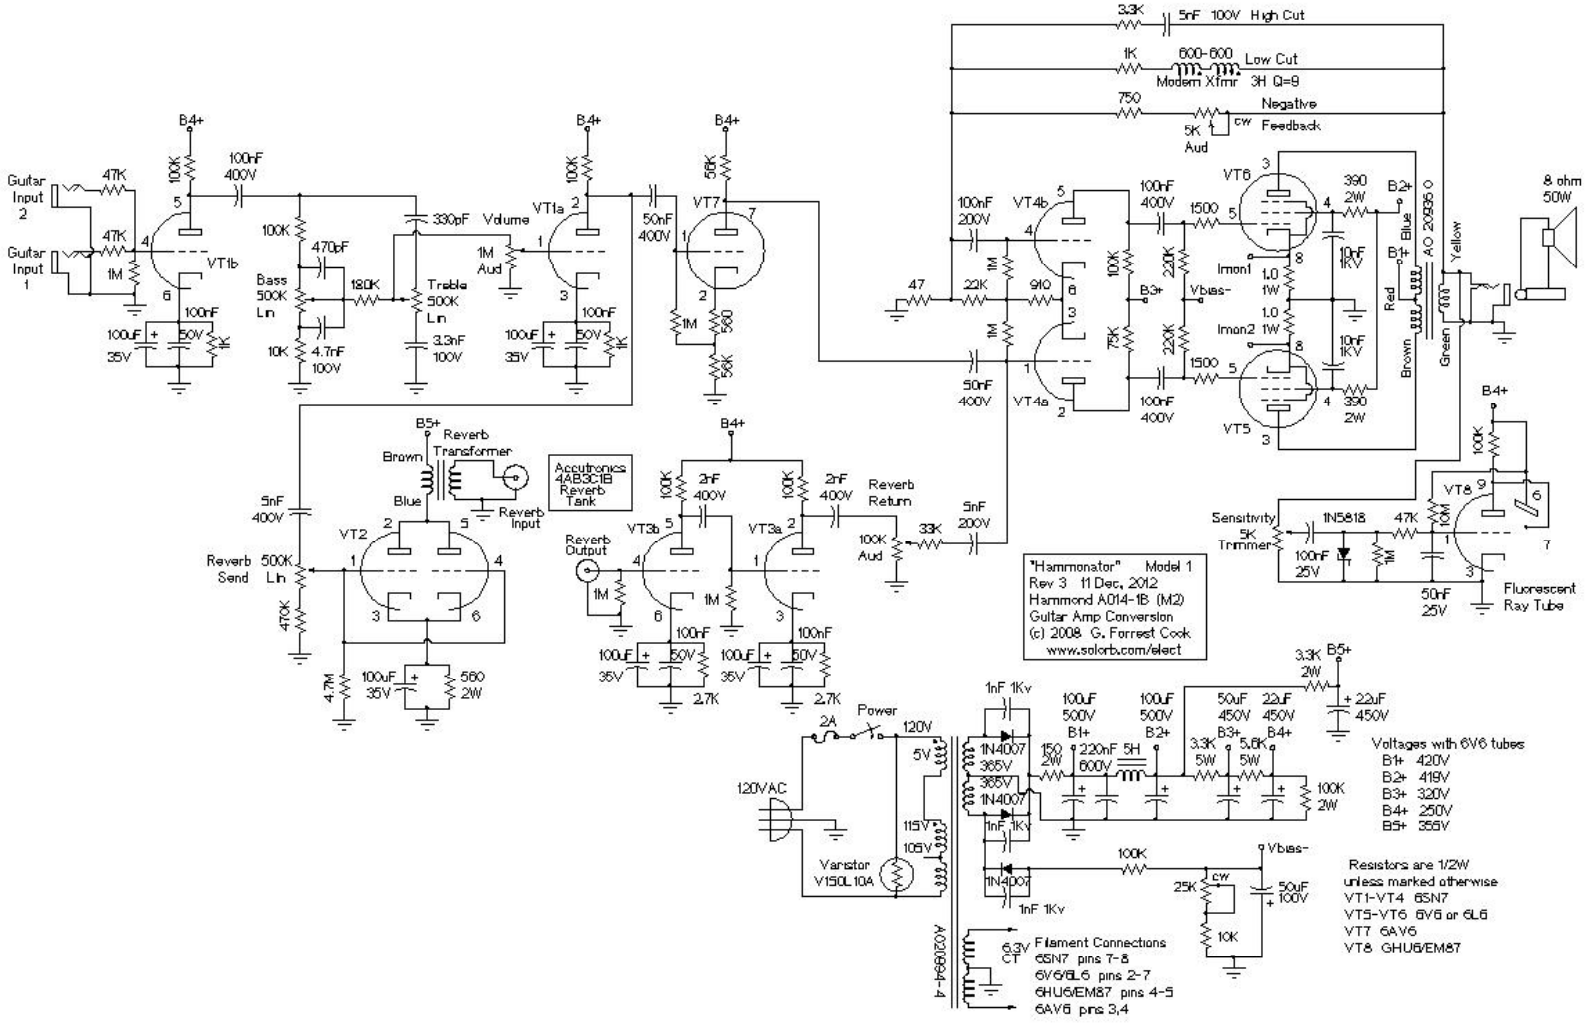
"Hammonator" Model 1
Rev 3 11 Dec, 2012
Hammond A014-1B (M2)
Guitar Amp Conversion
(c) 2008 G. Forrest Cook
www.solorb.com/elect
Accutronics 4AB3C1B Reverb Tank
Voltages with 6V6 tubes
B1+ 420V
B2+ 419V
B3+ 320V
B4+ 250V
B5+ 355V
Resistors are 1/2W unless marked otherwise
VT1-VT4 6SN7
VT5-VT6 6V6 or 6L6
VT7 6AV6
VT8 6HU6/EM87
Filament Connections
6SN7 pins 7-8
6V6/6L6 pins 2-7
6HU6/EM87 pins 4-5
6AV6 pins 3,4
Guitar Input 2
Guitar Input 1
Bass 500K Lin
Treble 500K Lin
Volume
Reverb Send 500K Lin
Reverb Transformer
Reverb Input
Reverb Output
Reverb Return
Sensitivity 5K Trimmer
Modern Xfmr 3H Q=9
Low Cut
High Cut
Negative Feedback
Fluorescent Ray Tube
8 ohm 50W
Power
120VAC
Varistor V150L10A
A-20306A-4