


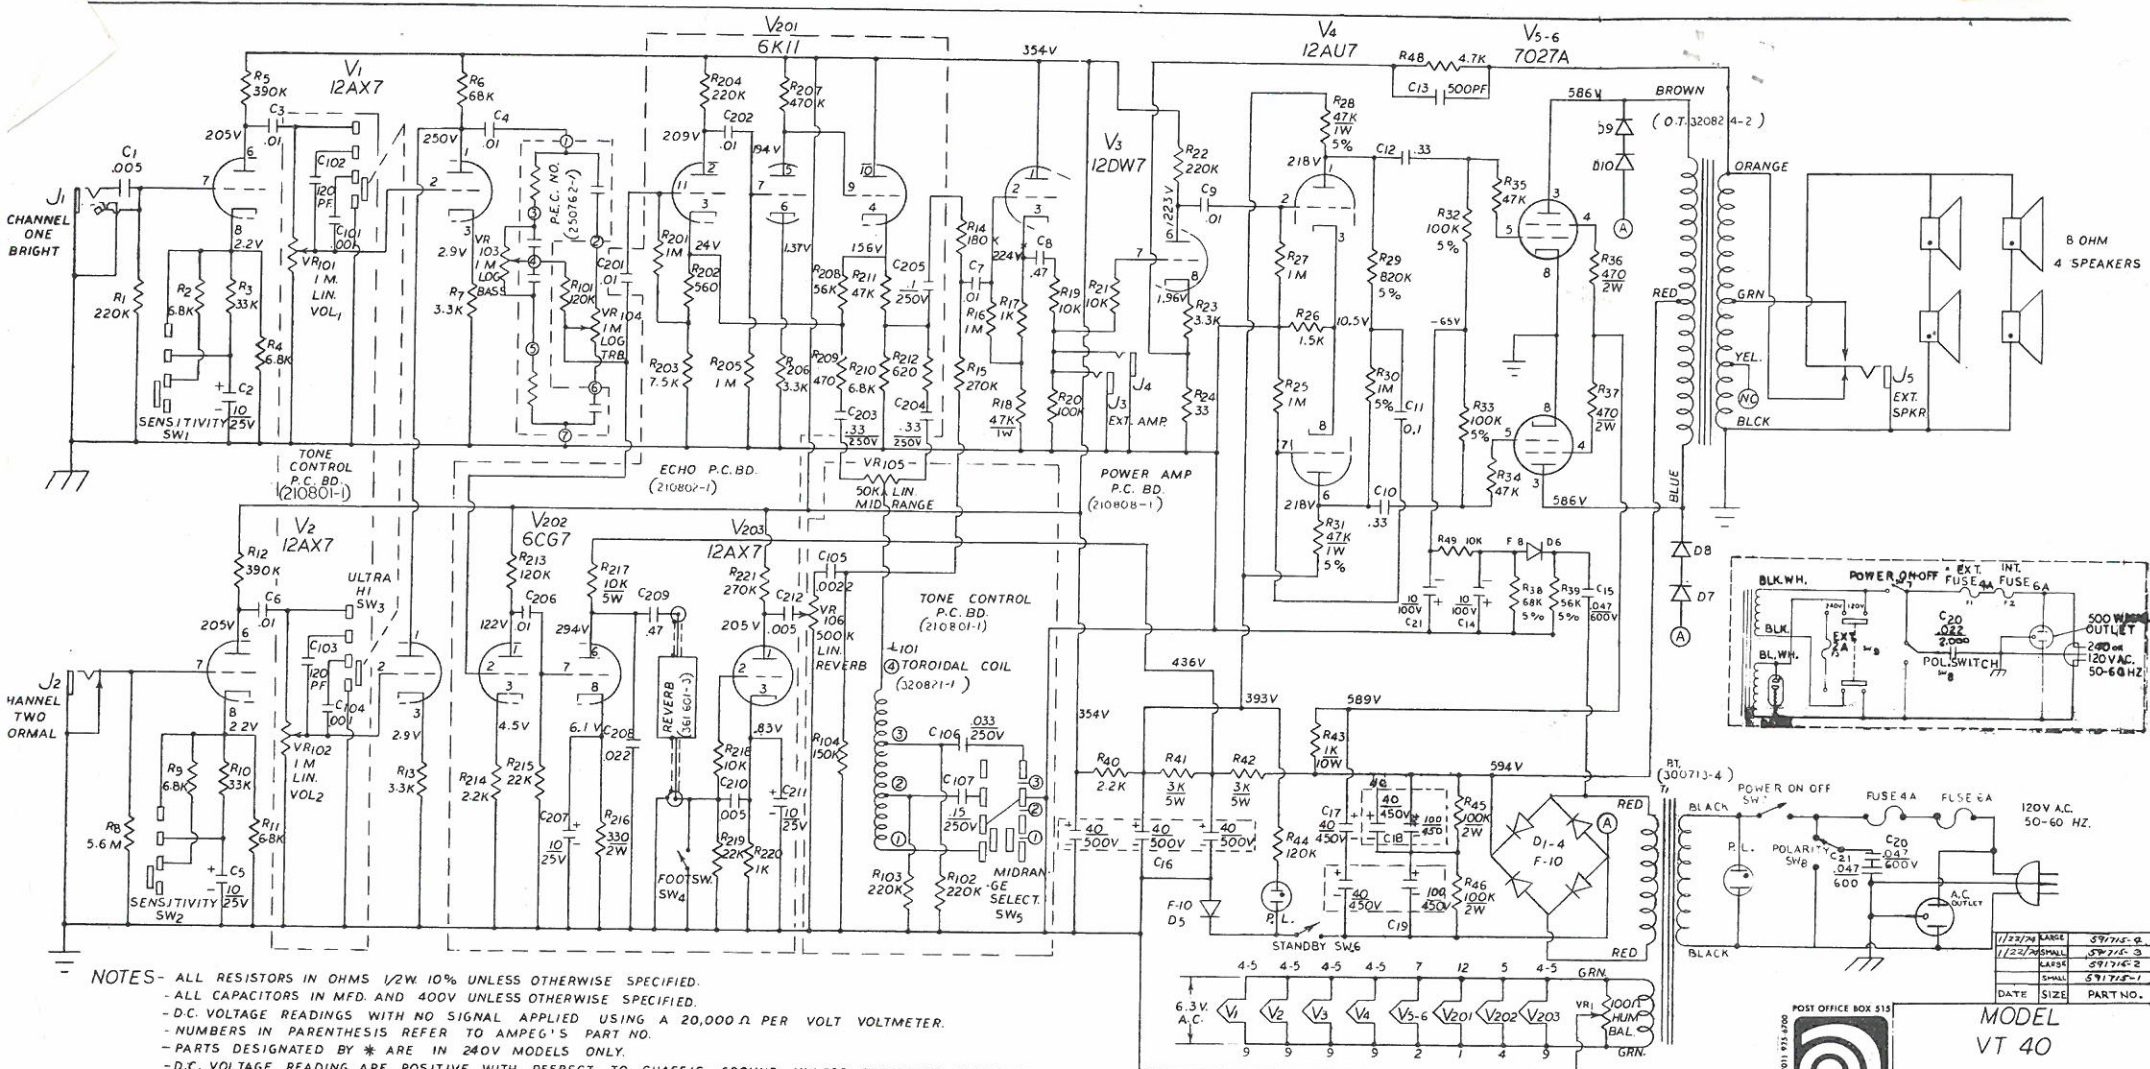

NOTES- ALL RESISTORS IN OHMS 1/2W 10% UNLESS OTHERWISE SPECIFIED.
- ALL CAPACITORS IN MFD. AND 400V UNLESS OTHERWISE SPECIFIED.
- D.C. VOLTAGE READINGS WITH NO SIGNAL APPLIED USING A 20,000 Ω PER VOLT VOLTMETER.
- NUMBERS IN PARENTHESIS REFER TO AMPEG'S PART NO.
- PARTS DESIGNATED BY * ARE IN 240V MODELS ONLY.
- D.C. VOLTAGE READING ARE POSITIVE WITH RESPECT TO CHASSIS GROUND UNLESS OTHERWISE SPECIFIED.
- CIRCUIT OF CHASSIS MAY VARY SLIGHTLY FROM THAT SHOWN HERE DUE TO NORMAL PRODUCTION CHANGES.
- D7-10 ARE SILICON AV TYPE 1AMR 1400V. DIODES.
- THE P.T. FOR 240V MODELS HAS BLCK WIRE CONNECTED TO BLUE WH. WIRE.

POST OFFICE BOX 515
ampeg
LINDEN, NEW JERSEY 07036

MODEL
VT 40

U.S. PATENT PENDING

DRN. BY	DATE	PART NO.	REV.
S.C.	4-71	31715	D

DATE SIZE PART NO.