


CHANNEL C/D

NOTES:

- \*1 : PART CAN BE REPLACED WITH 2SA1084 E
- AC VOLTAGE 1000 HZ, MEASURED WITH UTUM
- DC VOLTAGE MEASURED WITH VOLTMETER 100kOHM/V
- FADER IN RATED POSITION ( 0dB )  
ADDITIONAL GAIN WITH FADER IN MAX. POSITION
- SAFETY COMPONENT  
(MUST BE REPLACED BY ORIGINAL PART)

RATED CONDITIONS:

GAIN POTS MIN. OR MAX.  
ALL POTS IN CENTER-POSITION  
ALL FADERS AT 0dB  
MASTER-FADER-L/R AT +6dB

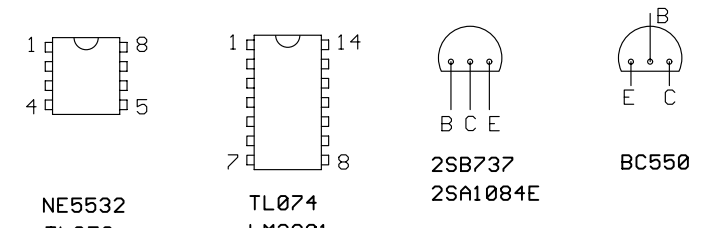

ALTERATIONS RESERVED!

Last modified: 07.04.2004 13:25:01				81358C	
Last plotted: 08.04.2004 14:03:54				CIRCUIT DIAGRAM	
DATE NAME				362 339	
DSG'D				PM1000/PM1600 -2	
CHK'D				2-	
APP'D					
ISSUE	REVISION	DATE	NAME	EVI AUDIO	