


VOLTAGE CHART*

NO.	TUBE TYPE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
V1	12AX7	115	0	1	GND	100	0	0	0	6.3 AC
V2	6BM8	0	22	0	6.3 AC	275	278	1.5	107	
V3	5Y3		285	0	260 AC	260 AC	278			

* ALL DC VOLTAGES MEASURED TO CHASSIS WITH 20,000 OHM-PER-VOLT METER

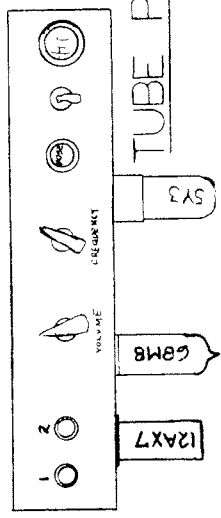

TUBE PLACEMENT

When only one instrument is used, plug into #1 input jack. The Tremolo effect is turned on by the Pointer knob marked "Frequency" located on the Control Panel. The speeds have been set to cover a wide range of Tremolo effects. This amplifier designed for 105-125 volt, 50-60 cycle current. Damage will result if connected to improper power source.

Use the above schematic to facilitate service by a reliable radio man. Do not use higher rating fuse than one ampere, type 3 A.G. This amplifier was carefully checked and in good playing condition when shipped. If damaged when received call transportation company immediately and place claim.