
DESCRIPTION AND RATING

The 6AQ5-A is a miniature beam-power pentode designed for use in the audio-frequency power output stage of television and radio receivers. It may also be used as a triode-connected vertical deflection amplifier in television receivers.

GENERAL
ELECTRICAL

Cathode—Coated Unipotential Heater Characteristics and Series Heater Ratings		Parallel Heater Operation	
Heater Voltage, AC or DC.....	6.3	6.3 ± 0.6†	Volts
Heater Current.....	0.45 ± 0.03*	0.45‡	Amperes
Heater Warm-up Time§.....	11	Seconds
Direct Interelectrode Capacitances, approximate¶			
Grid-Number 1 to Plate: (g1 to p).....	0.4	pf	
Input: g1 to (h+k+g2+b.p.).....	8.0	pf	
Output: p to (h+k+g2+b.p.).....	8.5	pf	

MECHANICAL

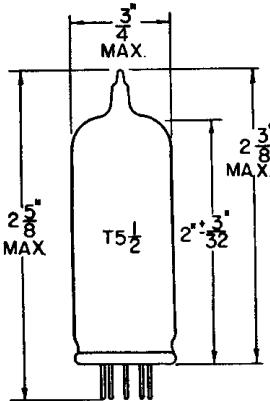
Mounting Position	Any
Envelope	T-5½, Glass
Base	E7-1, Miniature Button 7-Pin
Outline Drawing	EIA 5-3
Maximum Diameter	¾ Inches
Maximum Over-all Length	2 5/8 Inches
Maximum Seated Height	2 3/8 Inches

MAXIMUM RATINGS

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.


The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

PHYSICAL DIMENSIONS


EIA 5-3

TERMINAL CONNECTIONS

- Pin 1—Grid Number 1
- Pin 2—Cathode and Beam Plates
- Pin 3—Heater
- Pin 4—Heater
- Pin 5—Plate
- Pin 6—Grid Number 2 (Screen)
- Pin 7—Grid Number 1

BASING DIAGRAM


EIA 7BZ

MAXIMUM RATINGS

DESIGN-MAXIMUM VALUES

	Class A ₁ Amplifier	Vertical-Deflection Amplifier * (Triode Connection) △	
DC Plate Voltage.....	275	275	Volts
Peak Positive Pulse Plate Voltage.....	1100	Volts
Screen Voltage.....	275	Volts
Peak Negative Grid-Number 1 Voltage.....	275	Volts
Plate Dissipation.....	12	10**	Watts
Screen Dissipation.....	2.0	Watts
DC Cathode Current.....	40	Milliamperes
Peak Cathode Current.....	115	Milliamperes
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component.....	100	100	Volts
Total DC and Peak.....	200	200	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak.....	200	200	Volts
Grid-Number 1 Circuit Resistance			
With Fixed Bias.....	0.1	Megohms
With Cathode Bias.....	0.5	2.2	Megohms
Bulb Temperature at Hottest Point.....	250	250	C

CHARACTERISTICS AND TYPICAL OPERATION

CLASS A₁ AMPLIFIER

Plate Voltage.....	180	250	Volts
Screen Voltage.....	180	250	Volts
Grid-Number 1 Voltage.....	-8.5	-12.5	Volts
Peak AF Grid-Number 1 Voltage.....	8.5	12.5	Volts
Plate Resistance, approximate.....	58000	52000	Ohms
Transconductance.....	3700	4100	Micromhos
Zero-Signal Plate Current.....	29	45	Milliamperes
Maximum-Signal Plate Current.....	30	47	Milliamperes
Zero-Signal Screen Current.....	3.0	4.5	Milliamperes
Maximum-Signal Screen Current.....	4.0	7.0	Milliamperes
Load Resistance.....	5500	5000	Ohms
Total Harmonic Distortion, approximate.....	8	8	Percent
Maximum-Signal Power Output.....	2.0	4.5	Watts

PUSH-PULL CLASS AB₁ AMPLIFIER, VALUES FOR TWO TUBES

Plate Voltage.....	250	Volts
Screen Voltage.....	250	Volts
Grid-Number 1 Voltage.....	-15	Volts
Peak AF Grid-to-Grid Voltage.....	30	Volts
Zero-Signal Plate Current.....	70	Milliamperes
Maximum-Signal Plate Current.....	79	Milliamperes
Zero-Signal Screen Current.....	5.0	Milliamperes
Maximum-Signal Screen Current.....	13	Milliamperes
Effective Load Resistance, Plate-to-Plate.....	10000	Ohms
Total Harmonic Distortion, approximate.....	5	Percent
Maximum-Signal Power Output.....	10	Watts

AVERAGE CHARACTERISTICS, TRIODE CONNECTION △

Plate Voltage.....	250	Volts
Grid-Number 1 Voltage.....	-12.5	Volts
Amplification Factor.....	9.5	Ohms
Plate Resistance, approximate.....	1970	Micromhos
Transconductance.....	4800	Milliamperes
Plate Current.....	49.5	
Grid-Number 1 Voltage, approximate		
Ib = 0.5 Milliamperes.....	-37	Volts