


SERVICE CONNECTORS	
CNS1	
1	POSITIVE HIGH
2	POSITIVE LOW
3	POSITIVE RAIL
4	GROUND
5	RELAYDRIVE
CNS2	
1	GROUND
2	TEMPERATURE
3	NEGATIVE RAIL
4	NEGATIVE LOW
5	NEGATIVE HIGH
CNS3	
1	BIAS+
2	BIAS-
3	HOT
CNS4	
1	LIMITER-OFF
2	-15V
3	LIMITER-Test
4	GROUND
5	+15V
6	DC/HF-Testpunkt

CNI	
1	GROUND
2	OUTPUT
3	INPUT
4	INPUT
5	+ UB
6	LED SIGNAL
7	- UB
8	LED TBC
9	LED LIMIT
10	LED PROTECT
11	RELAYDRIVE
12	RELAY GROUND

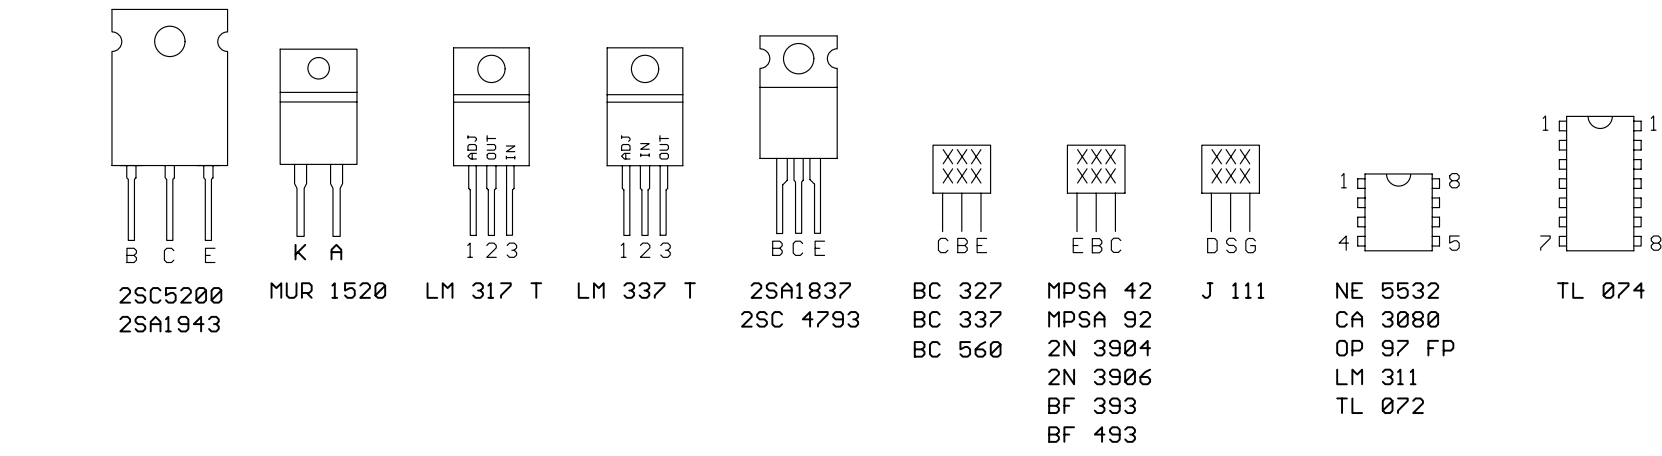

- SAFETY COMPONENT, FLAMEPROOF RESISTOR (MUST BE REPLACED BY ORIGINAL PART)
- POWER RESISTOR 4 WATT
- POWER RESISTOR 5 WATT
- AC VOLTAGE 1000 HZ, MEASURED WITH UTUM
- DC VOLTAGE MEASURED WITH VOLTMETER 100kOHM/V
- AC VOLTAGE 50/60 HZ MEASURED VOLTMETER 2000 OHMS/V

ALTERATIONS RESERVED!				84231	
				CIRCUIT DIAGRAM	
				359 250	
				SbA760	
				2-	