


# Schematic P-912A

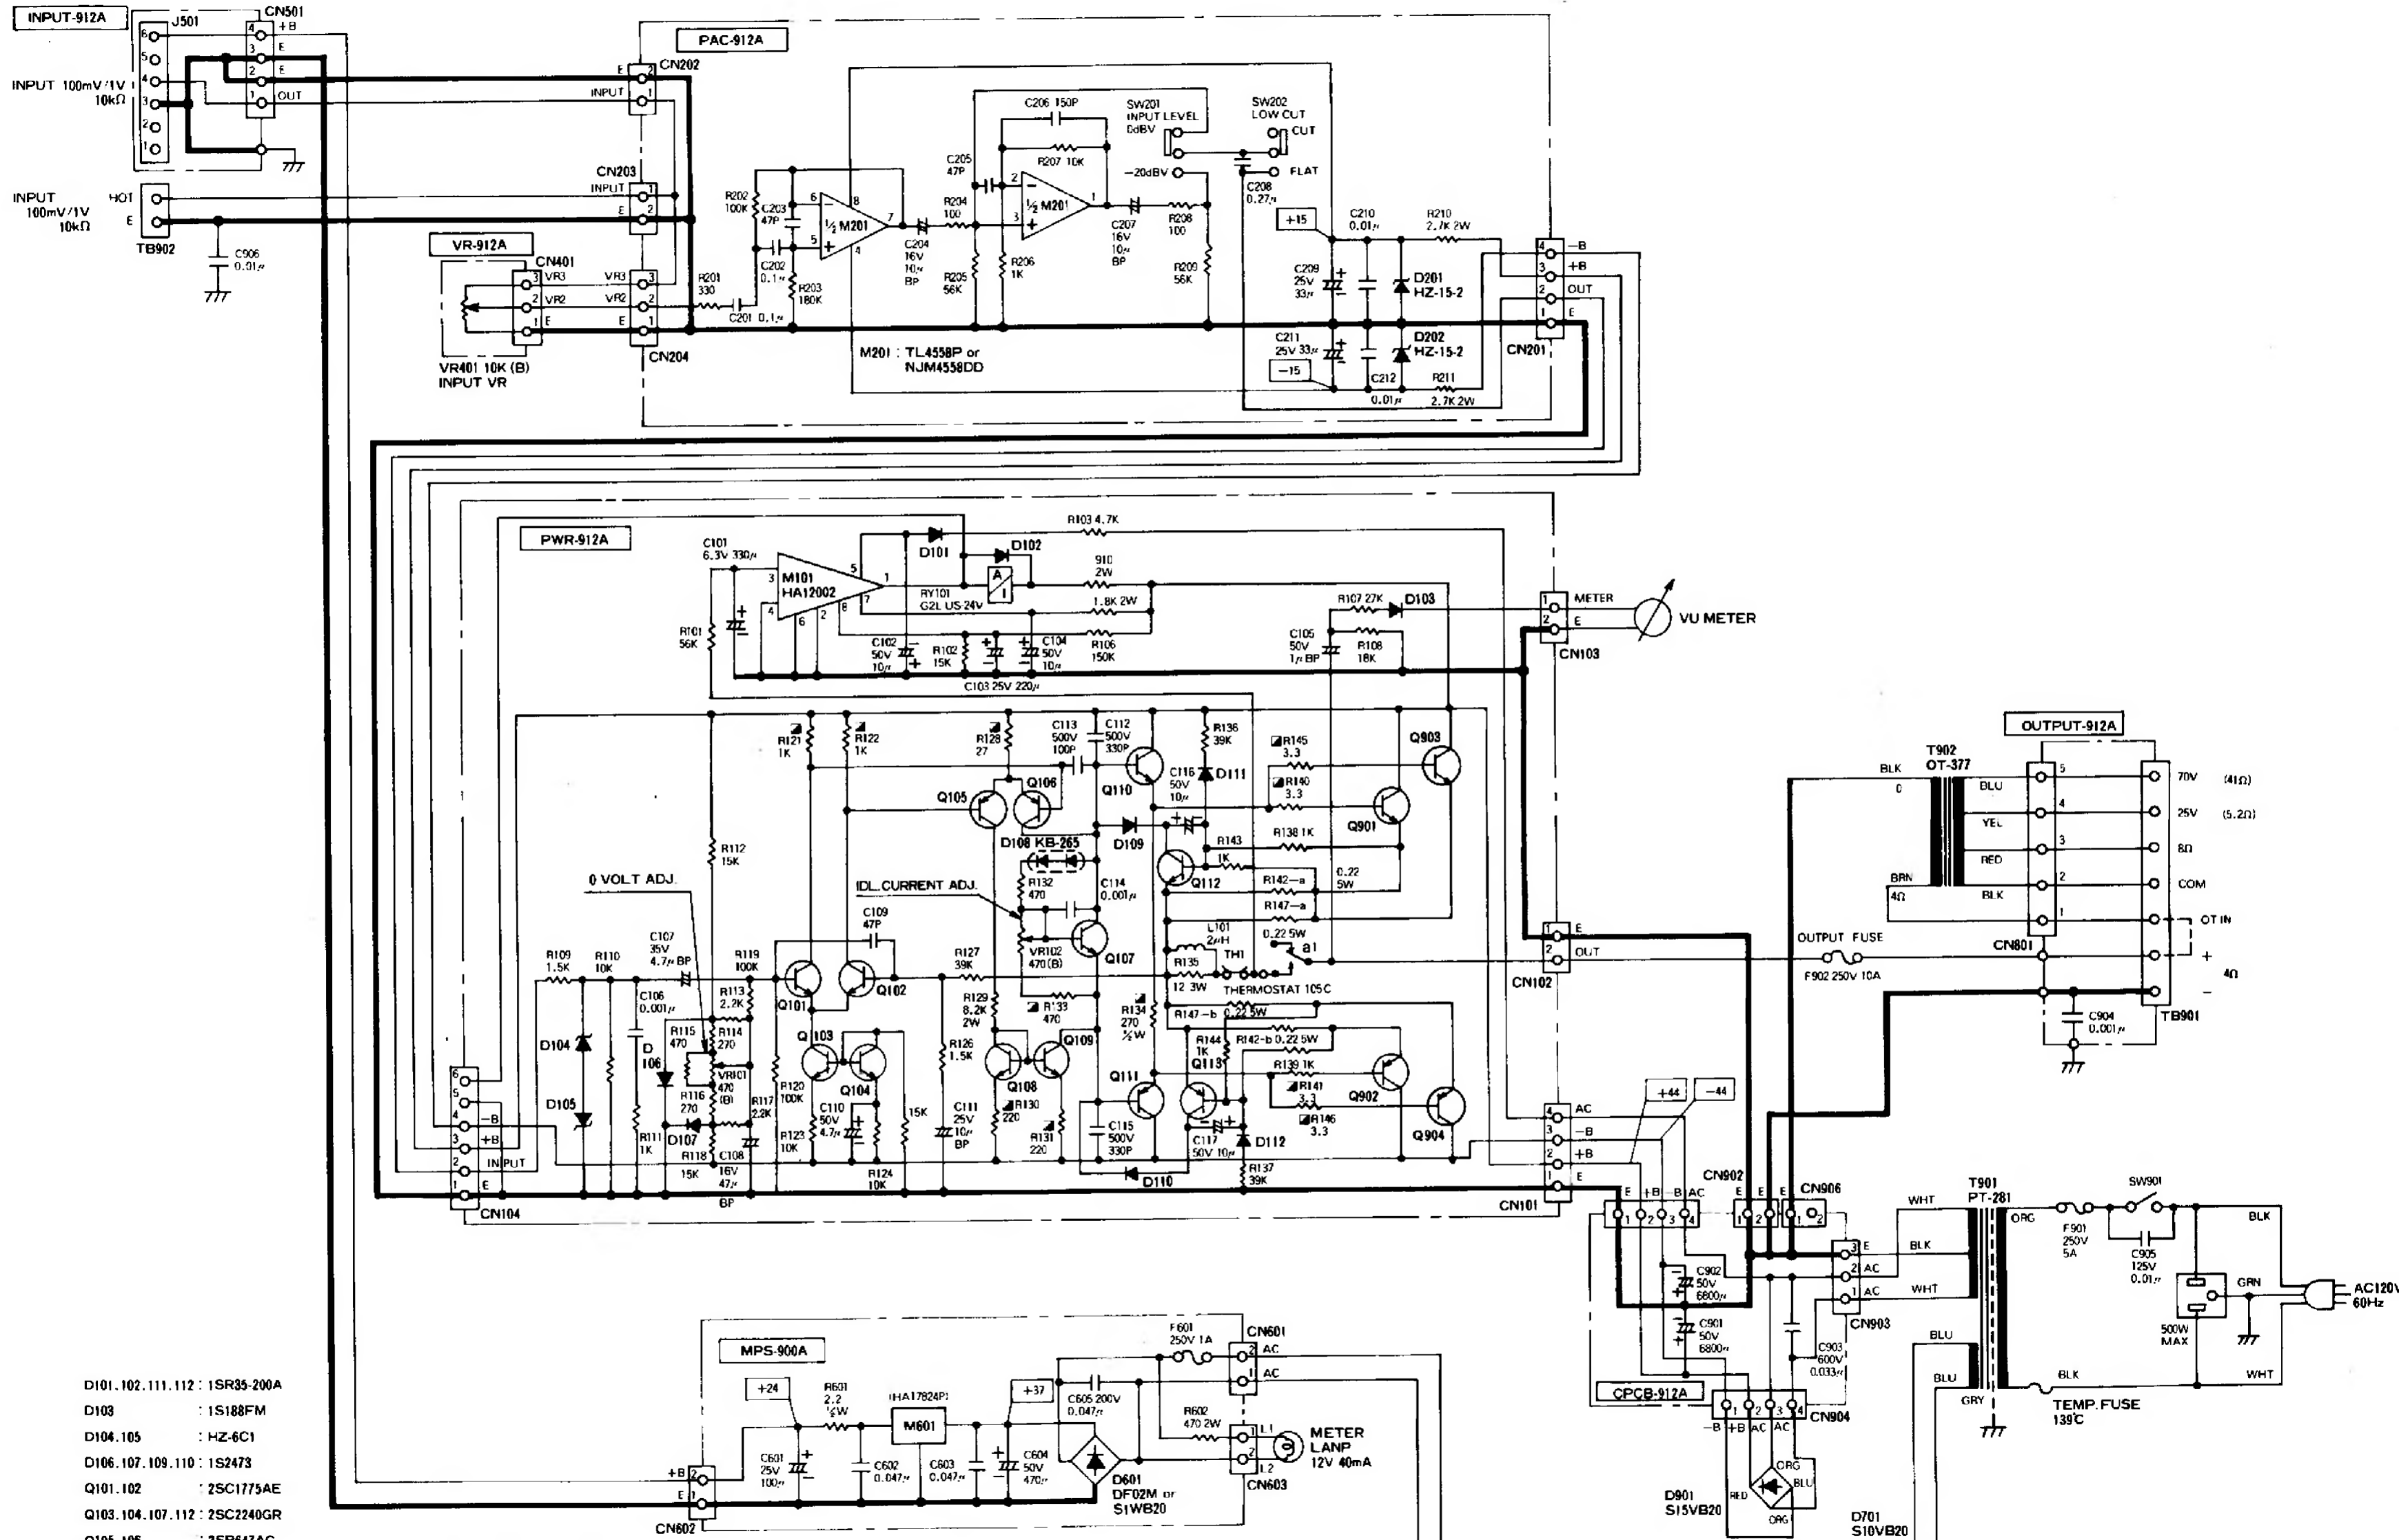

- D101, 102, 111, 112 : 1SR35-200A
- D103 : 1S188FM
- D104, 105 : HZ-6C1
- D106, 107, 109, 110 : 1S2473
- Q101, 102 : 2SC1775AE
- Q103, 104, 107, 112 : 2SC2240GR
- Q105, 106 : 2SB647AC
- Q108, 109 : 2SD667AC
- Q110 : 2SC2344E
- Q111 : 2SA1011E
- Q113 : 2SA970GR
- Q901 : 2SC3281
- Q902 : 2SA1802

1. RESISTANCE VALUES IN OHMS.
2. ALL RESISTORS 1/4W UNLESS OTHERWISE DESIGNATED.
3. CAPACITANCE VALUES IN FARADS UNLESS OTHERWISE DESIGNATED.
4. VOLTAGES ARE MEASURED TO CHASSIS GROUND WITH NO SIGNAL.
5. ALL CAPACITORS 50V UNLESS OTHERWISE DESIGNATED.
6. NONFLAMMABLE RESISTOR.