
## **Resistance Tapers**

Standard Linear	& 1	<b>Fapered</b>	Curves	(No	Taps)
-----------------	-----	----------------	--------	-----	-------

CTS Curve No.	% Resistance @ 50% Rotation		
Standard D	50%		
Special D (EIA "S" Curve)	50%		
С	5%		
A	10%		
В	15%		
BD	20%		
Н	25%		
J	30%		

Standard Residual resistance at ends of rotation

Standard CTS residual resistance, the maximum ohms at ends of rotation, is dependent upon overall resistance and construction characteristics of the series specified. Complete information may be obtained from the CTS plant of manufacture.

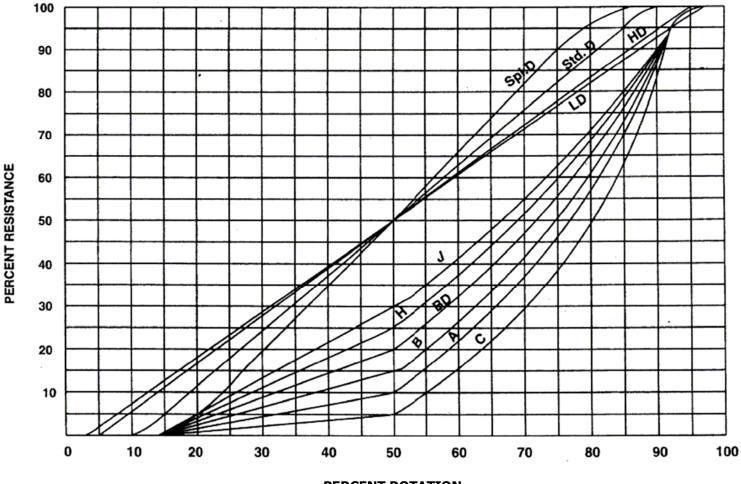

PERCENT ROTATION