


LAST REFNUM 66ED: J31 R74 C56 CR16 Q3 7

COPYRIGHT 1954 PEAVEY ELECTRONICS CORP. PRINTED IN U.S.A.

|   |            |
|---|------------|
| REV   | 1          |
| SIZE  | C          |
| CODE  | 30         |
| NUMBER  | 98671950   |
| DATE  | 24-MAR-54  |
| PRINT   | 1 OF 1     |
| TITLE   | CLASSIC 30 |
| PEAVEY ELECTRONICS CORP.<br>711 A STREET<br>MERIDIAN, MISSISSIPPI 39301 |            |

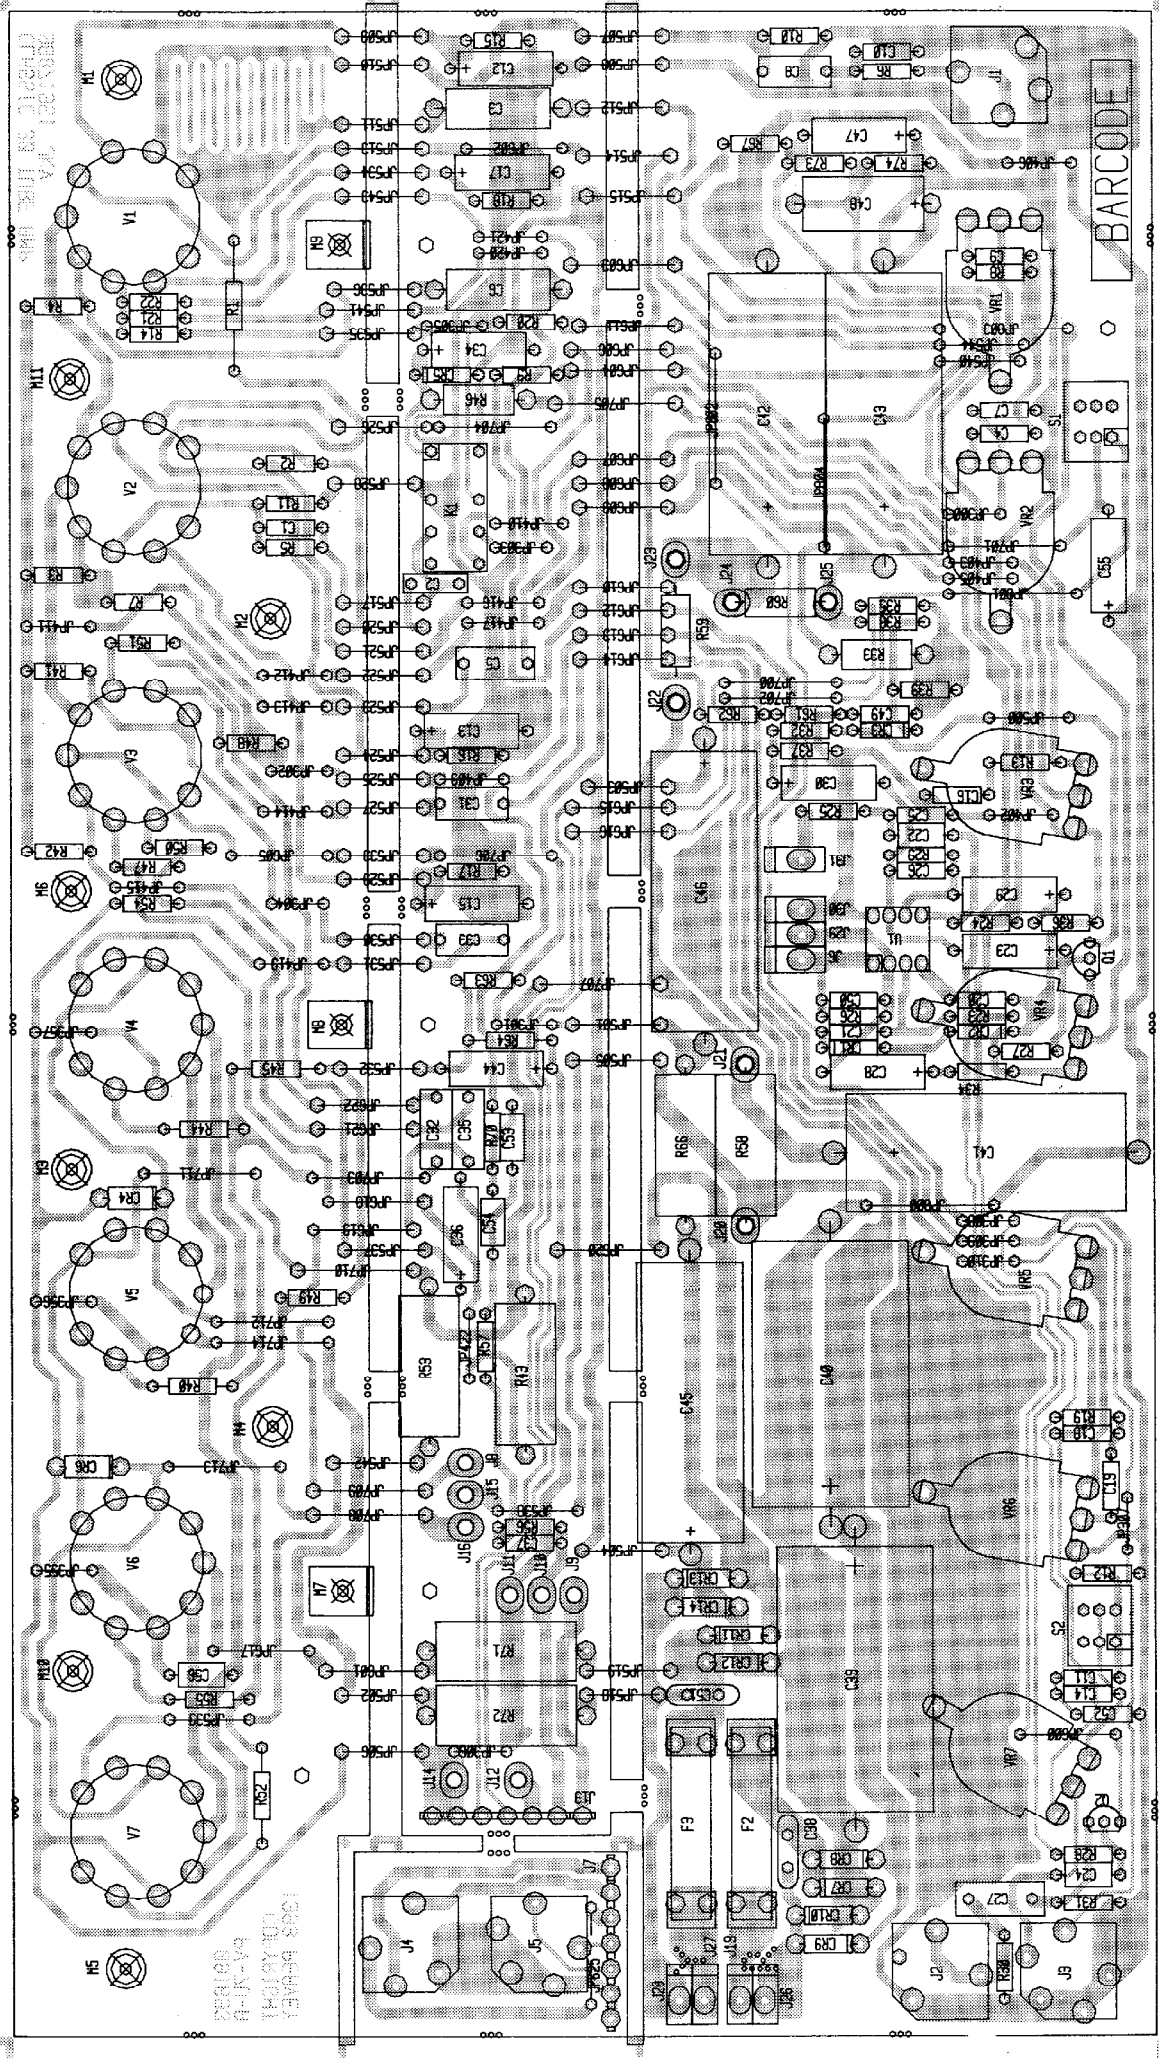

REV. 1.0  
DATE: 10/10/00  
BY: J. B. [unreadable]

REV. 1.0  
DATE: 10/10/00  
BY: J. B. [unreadable]

REV. 1.0  
DATE: 10/10/00  
BY: J. B. [unreadable]

REV. 1.0  
DATE: 10/10/00  
BY: J. B. [unreadable]

REV. 1.0  
DATE: 10/10/00  
BY: J. B. [unreadable]

REV. 1.0  
DATE: 10/10/00  
BY: J. B. [unreadable]

REV. 1.0  
DATE: 10/10/00  
BY: J. B. [unreadable]

# CLASSIC 30

| NAME | VALUE    | NUMBER   | DESCRIPTION                   | R12 | 220K    | 70240036 | 220K—1/4W—5%—CF—T&R      |
|------|----------|----------|-------------------------------|-----|---------|----------|--------------------------|
| C1   | 470PF    | 70340058 | 470PF 10% 50V TUB CER T&R     | R13 | 10K     | 70240025 | 10K—1/4W—5%—CF—T&R       |
| C10  | 39PF     | 70340052 | 39PF 50V TUB CER T&R          | R14 | 150K    | 70240035 | 150K—1/4W—5%—CF—T&R      |
| C11  | .047     | 70340017 | .047 MFD 10% 50V MON T&R      | R15 | 1.5K    | 70240018 | 1500—1/4W—5%—CF—T&R      |
| C12  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. T&R    | R16 | 1.5K    | 70240018 | 1500—1/4W—5%—CF—T&R      |
| C13  | 47A50L   | 70340063 | .47@50V LOW LEAKAGE           | R17 | 1K      | 70240017 | 1K—1/4W—5%—CF—T&R        |
| C14  | 270PF    | 70340057 | 270PF 10% 50V TUB CER T&R     | R18 | 1.5K    | 70240018 | 1500—1/4W—5%—CF—T&R      |
| C15  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. T&R    | R19 | 68K     | 70240032 | 68K—1/4W—5%—CF—T&R       |
| C16  | .015     | 70340010 | .015 MFD 10% 50V T/C T&R      | R2  | 150K    | 70240035 | 150K—1/4W—5%—CF—T&R      |
| C17  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. I & H  | R20 | 220K    | 70240036 | 220K—1/4W—5%—CF—T&R      |
| C18  | .022     | 70340012 | .022 MFD 10% 50V MON.T&R      | R21 | 2.2M    | 70240040 | 2.2M—1/4W—5%—CF—T&R      |
| C19  | .022     | 70340012 | .022 MFD 10% 50V MON.T&R      | R22 | 220K    | 70240036 | 220K—1/4W—5%—CF—T&R      |
| C20  | .001R630 | 70320160 | .001MF—5%—630V—MT R/W         | R23 | 1M      | 70240039 | 1M—1/4W—5%—CF—T&R        |
| C20  | .1       | 70340100 | .1 MFD +80-20LV AX.LP.T&R     | R24 | 100K    | 70240034 | 100K—1/4W—5%—CF—T&R      |
| C21  | .001     | 70340000 | .001 MFD 10% 50V MON T&R      | R25 | 1K      | 70240017 | 1K—1/4W—5%—CF—T&R        |
| C22  | .1P10    | 70340101 | .1 MFD 50 VDC 10% MON.T&R     | R26 | 22K     | 70240029 | 22K—1/4W—5%—CF—T&R       |
| C23  | 2.2A35   | 70320200 | 2.2MFD 35VDC LY.CAP T&R       | R27 | 10K     | 70240025 | 10K—1/4W—5%—CF—T&R       |
| C24  | .1P10    | 70340101 | .1 MFD 50 VDC 10% MON.T&R     | R28 | 1M      | 70240039 | 1M—1/4W—5%—CF—T&R        |
| C25  | 100PF    | 70340054 | 100PF 10% 50V TUB CER T&R     | R29 | 47K     | 70240031 | 47K—1/4W—5%—CF—T&R       |
| C26  | .0022    | 70340004 | .0022 MFD 10% 50V T/C T&R     | R3  | 100K    | 70240034 | 100K—1/4W—5%—CF—T&R      |
| C27  | .22R100M | 70330007 | .22MFD 100VDC 5% MYLAR        | R30 | 22K     | 70240029 | 22K—1/4W—5%—CF—T&R       |
| C28  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. T&R    | R31 | 22K     | 70240029 | 22K—1/4W—5%—CF—T&R       |
| C29  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. T&R    | R32 | 2.2M    | 70240040 | 2.2M—1/4W—5%—CF—T&R      |
| C3   | .047A400 | 70320105 | .047 MFD 400 V T&R CAP        | R33 | 1.5KW1  | 70210007 | 1500—1W—5%—MO—T&R        |
| C30  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. T&R    | R34 | 22      | 70240007 | 22—1/4W—5%—CF—T&R        |
| C31  | .1R250MY | 70320096 | .1 MFD 250 VDC MYLAR CA/BR    | R35 | 100     | 70240010 | 100—1/4W—5%—CF—T&R       |
| C32  | .022R400 | 70320106 | .022 MFD 400 V CAP            | R36 | 2.2K    | 70240020 | 2200—1/4W—5%—CF—T&R      |
| C33  | .1R250MY | 70320096 | .1 MFD 250 VDC MYLAR CA/BR    | R37 | 2.7K    | 70240021 | 2700—1/4W—5%—CF—T&R      |
| C34  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. T&R    | R38 | 1M      | 70240039 | 1M—1/4W—5%—CF—T&R        |
| C35  | .022R400 | 70320106 | .022 MFD 400 V CAP            | R39 | 68K     | 70240032 | 68K—1/4W—5%—CF—T&R       |
| C36  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. T&R    | R4  | 150K    | 70240035 | 150K—1/4W—5%—CF—T&R      |
| C37  | .0047    | 70340007 | .0047 MFD 10% 50V MON T&R     | R40 | 47K     | 70240031 | 47K—1/4W—5%—CF—T&R       |
| C38  | .01CER   | 70320099 | .01MFD 1000VDC CD-UNCUT       | R41 | 100K    | 70240034 | 100K—1/4W—5%—CF—T&R      |
| C39  | 47A500   | 70320005 | 47MF—10%—500VDC-EL-AX         | R42 | 68K     | 70240032 | 68K—1/4W—5%—CF—T&R       |
| C4   | 470PF    | 70340058 | 470PF 10% 50V TUB CER T&R     | R43 | 100W5   | 70250006 | 100—5W—10%—WW—AXL        |
| C40  | 47A500   | 70320005 | 47MF—10%—500VDC-EL-AX         | R44 | 47K     | 70240031 | 47K—1/4W—5%—CF—T&R       |
| C41  | 22A450   | 70320020 | 22 MFD 450 VDC LYTIC CAP      | R45 | 220K    | 70240036 | 220K—1/4W—5%—CF—T&R      |
| C42  | 22A450   | 70320020 | 22 MFD 450 VDC LYTIC CAP      | R46 | 1.5KW1  | 70210007 | 1500—1W—5%—MO—T&R        |
| C43  | 22A450   | 70320020 | 22 MFD 450 VDC LYTIC CAP      | R47 | 1M      | 70240039 | 1M—1/4W—5%—CF—T&R        |
| C44  | 22A25    | 70320012 | 22 MFD 25VDC LYT. CAP. T&R    | R48 | 1M      | 70240039 | 1M—1/4W—5%—CF—T&R        |
| C45  | 2200A50  | 70320036 | 2200 MFD 50 VDC LYTIC CAP     | R49 | 220K    | 70240036 | 220K—1/4W—5%—CF—T&R      |
| C46  | 2200A50  | 70320036 | 2200 MFD 50 VDC LYTIC CAP     | R5  | 470K    | 70240038 | 470K—1/4W—5%—CF—T&R      |
| C47  | 10A50    | 70320112 | 10 MFD 50 V T&R               | R50 | 1.5K    | 70240018 | 1500—1/4W—5%—CF—T&R      |
| C48  | 100A25   | 70320014 | 100 MFD 25 VDC LYTIC CAP      | R51 | 1.5K    | 70240018 | 1500—1/4W—5%—CF—T&R      |
| C49  | .047P80  | 70340016 | .047MFD+80-20 50V MON T&R     | R52 | 47K     | 70240031 | 47K—1/4W—5%—CF—T&R       |
| C5   | .022R400 | 70320106 | .022 MFD 400 V CAP            | R53 | 100W5   | 70250006 | 100—5W—10%—WW—AXL        |
| C50  | .015     | 70340010 | .015 MFD 10% 50V T/C T&R      | R54 | 68K     | 70240032 | 68K—1/4W—5%—CF—T&R       |
| C51  | .01CER   | 70320099 | .01MFD 1000VDC CD-UNCUT       | R55 | 47K     | 70240031 | 47K—1/4W—5%—CF—T&R       |
| C52  | .0015    | 70340002 | .0015 MFD 10% 50V T/C T&R     | R56 | 220K    | 70240036 | 220K—1/4W—5%—CF—T&R      |
| C53  | .1P10    | 70340101 | .1 MFD 50 VDC 10% MON.T&R     | R57 | 100K    | 70240034 | 100K—1/4W—5%—CF—T&R      |
| C54  | .1P10    | 70340101 | .1 MFD 50 VDC 10% MON.T&R     | R58 | 400W5FP | 70250020 | 400—5W—10%—FP 67—AXL     |
| C55  | 10A50    | 70320112 | 10 MFD 50 V T&R               | R59 | 10KW1   | 70210018 | 10K—1W—5%—MO—T&R         |
| C56  | .1P10    | 70340101 | .1 MFD 50 VDC 10% MON.T&R     | R6  | 47K     | 70240031 | 47K—1/4W—5%—CF—T&R       |
| C6   | .047A400 | 70320105 | .047 MFD 400 V T&R CAP        | R60 | 10KW1   | 70210018 | 10K—1W—5%—MO—T&R         |
| C7   | 470PF    | 70340058 | 470PF 10% 50V TUB CER T&R     | R61 | 47FP    | 70240090 | 47FP—1/4W—5%—FP—T&R      |
| C8   | .1R250MY | 70320096 | .1 MFD 250 VDC MYLAR CA/BR    | R62 | 47FP    | 70240090 | 47FP—1/4W—5%—FP—T&R      |
| C9   | .001     | 70340000 | .001 MFD 10% 50V MON T&R      | R63 | 47K     | 70240031 | 47K—1/4W—5%—CF—T&R       |
| CR1  | 1N757    | 70400757 | 1N757A 9.1V 5% ZENER T&R      | R64 | 33K     | 70240030 | 33K—1/4W—5%—CF—T&R       |
| CR10 | 1N4007   | 70460007 | 1N4007 1KV.1A SIL. DIODE      | R66 | 15W5    | 70241097 | 15—5W—10%—WW—AXL         |
| CR11 | 1N4003   | 70464003 | 1N4003 200V SILICON DIODE     | R67 | 180     | 70240012 | 180—1/4W—5%—CF—T&R       |
| CR12 | 1N4003   | 70464003 | 1N4003 200V SILICON DIODE     | R7  | 1M      | 70240039 | 1M—1/4W—5%—CF—T&R        |
| CR13 | 1N4003   | 70464003 | 1N4003 200V SILICON DIODE     | R70 | 10K     | 70240025 | 10K—1/4W—5%—CF—T&R       |
| CR14 | 1N4003   | 70464003 | 1N4003 200V SILICON DIODE     | R71 | 3W5     | 70250041 | 3—5W—10%—WW—AXL          |
| CR2  | 1N757    | 70400757 | 1N757A 9.1V 5% ZENER T&R      | R72 | 3W5     | 70250041 | 3—5W—10%—WW—AXL          |
| CR3  | 1N4148   | 70464148 | 1N4148 75V 10MA SILICON DIODE | R73 | 10K     | 70240025 | 10K—1/4W—5%—CF—T&R       |
| CR4  | SR2873   | 70402873 | SR-2873 2KV,250MA SIL DIO     | R74 | 10K     | 70240025 | 10K—1/4W—5%—CF—T&R       |
| CR5  | 1N4148   | 70464148 | 1N4148 75V 10MA SILICON DIODE | R8  | 680K    | 70240065 | 680K—1/4W—5%—CF—T&R      |
| CR6  | SR2873   | 70402873 | SR-2873 2KV,250MA SIL DIO     | R9  | 2.2M    | 70240040 | 2.2M—1/4W—5%—CF—T&R      |
| CR7  | 1N4007   | 70460007 | 1N4007 1KV.1A SIL. DIODE      | S1  | SUZPP   | 71322251 | SUZ P/P SWITCH PC MOUNT  |
| CR8  | 1N4007   | 70460007 | 1N4007 1KV.1A SIL. DIODE      | S2  | SUZPP   | 71322251 | SUZ P/P SWITCH PC MOUNT  |
| CR9  | 1N4007   | 70460007 | 1N4007 1KV.1A SIL. DIODE      | U1  | 4558    | 70404558 | RC-4558,P DUAL BI-PKG 10 |
| F2   | 1AFB     | 70900085 | FUSE AGC 1                    | V1  | 12AX7   | 70806612 | 12 AX7/ECC 83 TUBE       |
| F3   | 10AFB    | 70900370 | ABC 10 AMP FUSE 250V          | V2  | 12AX7   | 70806612 | 12 AX7/ECC 83 TUBE       |
| J1   | HIDMNI   | 71466214 | 2 TIP HID JACK NINS W/SPD     | V3  | 12AX7   | 70806612 | 12 AX7/ECC 83 TUBE       |
| J2   | HIDMNI   | 71466214 | 2 TIP HID JACK NINS W/SPD     | V4  | EL84    | 70806623 | EL-84 TUBE               |
| J3   | HIDSNI   | 71466217 | STEREO HID JACK NINS W/SP     | V5  | EL84    | 70806623 | EL-84 TUBE               |
| J4   | HIDMNI   | 71466214 | 2 TIP HID JACK NINS W/SPD     | V6  | EL84    | 70806623 | EL-84 TUBE               |
| J5   | HIDSNI   | 71466217 | STEREO HID JACK NINS W/SP     | V7  | EL84    | 70806623 | EL-84 TUBE               |
| K1   | 12VRELAY | 71322277 | DPDT RELAY 12V                | VR1 | POT0339 | 71190339 | 250KA 20% MET SPDR 1MM   |
| Q1   | J231     | 70400231 | J-231-TO-92-N-CHAN, 40VFET    | VR2 | 1MAMSP5 | 71190313 | 1 MEG AUD 5% MET SPIDER  |
| Q2   | 6534     | 70406533 | MPS-6533/34 TO-92 PNP TRANS   | VR3 | POT0337 | 71190337 | 10KA 20% MET SPDR 1MM    |
| R1   | 150K     | 70240035 | 150K—1/4W—5%—CF—T&R           | VR4 | POT0336 | 71190336 | 10K LIN MET SPIDER 1MM   |
| R10  | 470K     | 38 470K  | —1/4W—5%—CF—T&R               | VR5 | 1MAMSP5 | 71190313 | 1 MEG AUD 5% MET SPIDER  |
| R11  | 470K     | 38 470K  | —1/4W—5%—CF—T&R               | VR6 | 20KSMS  | 71190326 | 20K S TAP MET SPIDER     |
|      |          |          |                               | VR7 | POT0334 | 71190334 | 250K LIN METRIC SPDR 1MM |