




Silkyn Super 50
Output Transformer
Schematic Diagram
O/Netics PN 10169 C

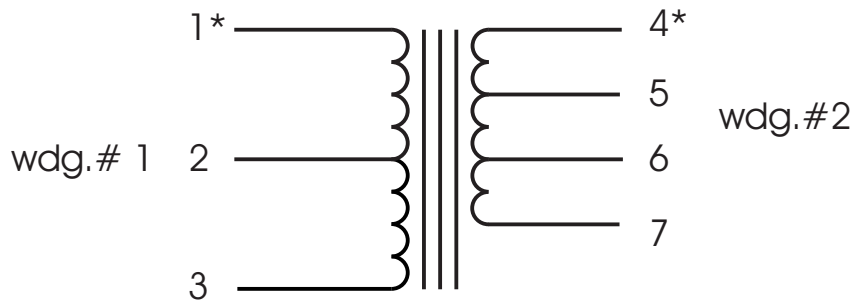

Lead color chart

- 1* Brown
- 2 White
- 3 Blue
- 4* Black
- 5 Red
- 6 Green
- 7 Grey

Input:

Primary Impedance;

Leads 1* to 3: 4.4K Z Ohms

(206 vac from Brown to White)

Output:

Secondary impedance;

Leads 4* to 5: 4 Ohms (12.4 vac no load)

Leads 4* to 6: 8 Ohms (17.6 vac no load)

Leads 4* to 7: 16 Ohms (24.8 vac no load)