





Precision Socket Head Shoulder Screws

■ CLASS 3A THREAD

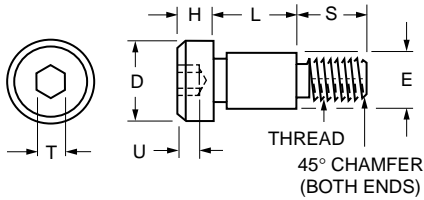



MATERIAL: 303 Stainless Steel

Catalog Number	Thread Size	D Dia. ±.010	E Dia. ±.0005	Dimensions				
				H ±.010	L ±.001	S ±.010	T	U
S7092Y-G44-0404 S7092Y-G44-0406 S7092Y-G44-0408 S7092Y-G44-0410 S7092Y-G44-0412	#4-40 UNC-3A	.250	.1240	.125	.1265	.156	5/64	1/16
.1890								
.2515								
.3140								
.3765								
S7092Y-G44-0604 S7092Y-G44-0606 S7092Y-G44-0608 S7092Y-G44-0610 S7092Y-G44-0612	#8-32 UNC-3A	.313	.1865	.156	.1265	.188	3/32	5/64
.1890								
.2515								
.3140								
.3765								
S7092Y-G44-0616 S7092Y-G44-0620 S7092Y-G44-0624 S7092Y-G44-0632 S7092Y-G44-0640 S7092Y-G44-0648	#8-32 UNC-3A	.313	.1865	.156	.5015	.188	3/32	5/64
.6265								
.7515								
1.0015								
1.2515								
1.5015								
S7092Y-G44-0804 S7092Y-G44-0806 S7092Y-G44-0808 S7092Y-G44-0810 S7092Y-G44-0812	#10-32 UNF-3A	.375	.2490	.188	.1265	.250	1/8	3/32
.1890								
.2515								
.3140								
.3765								
S7092Y-G44-0816 S7092Y-G44-0820 S7092Y-G44-0824 S7092Y-G44-0832 S7092Y-G44-0840 S7092Y-G44-0848	#10-32 UNF-3A	.375	.2490	.188	.5015	.250	1/8	3/32
.6265								
.7515								
1.0015								
1.2515								
1.5015								
S7092Y-G44-1008 S7092Y-G44-1010 S7092Y-G44-1012 S7092Y-G44-1016 S7092Y-G44-1020 S7092Y-G44-1024	1/4-20 UNC-3A	.500	.3115	.219	.2515	.438	5/32	1/8
.3140								
.3765								
.5015								
.6265								
.7515								
S7092Y-G44-1210 S7092Y-G44-1212 S7092Y-G44-1216 S7092Y-G44-1220	1/4-20 UNC-3A	.500	.3740	.219	.3140	.438	5/32	1/8
.3765								
.5015								
.6265								
S7092Y-G44-1210A S7092Y-G44-1212A S7092Y-G44-1216A S7092Y-G44-1220A	5/16-18 UNC-3A	.563	.3740	.250	.3140	.500	3/16	5/32
.3765								
.5015								
.6265								
S7092Y-G44-1616 S7092Y-G44-1620 S7092Y-G44-1624 S7092Y-G44-1632	3/8-16 UNC-3A	.750	.4990	.313	.5015	.625	1/4	3/16
.6265								
.7515								
1.0015								



INCH

Socket Head Shoulder Screws


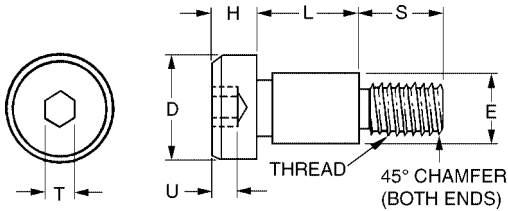


MATERIAL: 303 Stainless Steel

Catalog Number	Thread Size	D Dia.	E ^{+0.000} - .003 Dia.	H	L ^{+0.005} - .000	S	T	U (Min.)							
A 9X25-0404	#4-40	1/4	.125	1/8	.125	5/32	5/64	1/16							
A 9X25-0406					.188										
A 9X25-0408					.250										
A 9X25-0410					.312										
A 9X25-0412					.375										
A 9X25-0604	#8-32	5/16	.187	5/32	.125	3/16	3/32	5/64							
A 9X25-0606					.188										
A 9X25-0608					.250										
A 9X25-0610					.312										
A 9X25-0612					.375										
A 9X25-0616					.500										
A 9X25-0620					.625										
A 9X25-0624					.750										
A 9X25-0632					1.000										
A 9X25-0640					1.250										
A 9X25-0648					1.500										
A 9X25-0804					#10-32				3/8	.250	3/16	.125	1/4	1/8	3/32
A 9X25-0806	.188														
A 9X25-0808	.250														
A 9X25-0810	.312														
A 9X25-0812	.375														
A 9X25-0816	.500														
A 9X25-0820	.625														
A 9X25-0824	.750														
A 9X25-0832	1.000														
A 9X25-0840	1.250														
A 9X25-0848	1.500														
A 9X25-1008	1/4-20	1/2	.312	7/32		.250	7/16	5/32				1/8			
A 9X25-1010						.312									
A 9X25-1012						.375									
A 9X25-1016						.500									
A 9X25-1020					.625										
A 9X25-1024			.750												
A 9X25-1210			.375							.312					
A 9X25-1212										.375					
A 9X25-1216										.500					
A 9X25-1220										.625					
A 9X25-1210A	.312														
A 9X25-1212A	.375														
A 9X25-1216A	5/16-18	9/16	.375	1/4	.500	1/2	3/16	5/32							
A 9X25-1216A					.625										
A 9X25-1220A					.625										
A 9X25-1616	3/8-16	3/4	.500	5/16	.500	5/8	1/4	3/16							
A 9X25-1620					.625										
A 9X25-1624					.750										
A 9X25-1632					1.000										



S INCH**Precision Slotted Head Shoulder Screws**

■ CLASS 3A THREAD

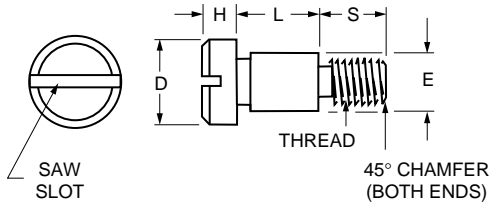**S** Precision Component

MATERIAL: 303 Stainless Steel

Catalog Number	Thread Size	D Dia. ± .010	E Dia. ± .0005	Dimensions		
				H ± .010	L ± .001	S ± .010
S7092Y-G42-0404 S7092Y-G42-0406	#4-40 UNC-3A	.250	.1240	.125	.1265	.156
.1890						
.2515						
.3140						
S7092Y-G42-0410 S7092Y-G42-0412	#8-32 UNC-3A	.313	.1865	.156	.3765	.188
.1265						
.1890						
.2515						
S7094Y-G42-0604 S7094Y-G42-0606	#8-32 UNC-3A	.313	.1865	.156	.3140	.188
.3765						
.5015						
.6265						
S7094Y-G42-0616 S7094Y-G42-0620 S7094Y-G42-0624	#10-32 UNF-3A	.375	.2490	.188	.7515	.250
1.0015						
1.2515						
1.5015						
S7095Y-G42-0804 S7095Y-G42-0806 S7095Y-G42-0808 S7095Y-G42-0810 S7095Y-G42-0812	#10-32 UNF-3A	.375	.2490	.188	.1265	.250
.1890						
.2515						
.3140						
S7095Y-G42-0816 S7095Y-G42-0820 S7095Y-G42-0824 S7095Y-G42-0832 S7095Y-G42-0840 S7095Y-G42-0848	1/4-20 UNC-3A	.500	.3115	.219	.3765	.438
.5015						
.6265						
.7515						
S7096Y-G42-1008 S7096Y-G42-1010 S7096Y-G42-1012 S7096Y-G42-1016 S7096Y-G42-1020 S7096Y-G42-1024	1/4-20 UNC-3A	.500	.3115	.219	.3140	.438
.3765						
.5015						
.6265						
S7096Y-G42-1210 S7096Y-G42-1212 S7096Y-G42-1216 S7096Y-G42-1220	5/16-18 UNC-3A	.563	.3740	.250	.3765	.500
.5015						
.6265						
.6265						
S7097Y-G42-1210A S7097Y-G42-1212A S7097Y-G42-1216A S7097Y-G42-1220A	3/8-16 UNC-3A	.750	.4990	.313	.3140	.625
.3765						
.5015						
.6265						
S7098Y-G42-1616 S7098Y-G42-1620 S7098Y-G42-1624 S7098Y-G42-1632	3/8-16 UNC-3A	.750	.4990	.313	.5015	.625
.6265						
.7515						
1.0015						

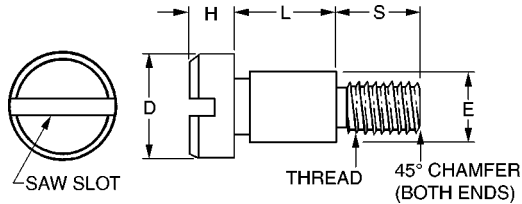**INCH****Slotted Head Shoulder Screws****MATERIAL:** 303 Stainless Steel

Catalog Number	Thread Size	D Dia.	E $\begin{matrix} +.000 \\ -.004 \end{matrix}$ Dia.	H	L $\pm .005$	S
A 9X15-0404	#4-40	1/4	.124	1/8	.125	5/32
A 9X15-0406					.188	
A 9X15-0408					.250	
A 9X15-0410					.313	
A 9X15-0412					.375	
A 9X15-0604	#8-32	5/16	.187	5/32	.125	3/16
A 9X15-0606					.188	
A 9X15-0608					.250	
A 9X15-0610					.313	
A 9X15-0612					.375	
A 9X15-0616					.500	
A 9X15-0620					.625	
A 9X15-0624					.750	
A 9X15-0632					1.000	
A 9X15-0640					1.250	
A 9X15-0648	1.500					
A 9X15-0804	#10-32	3/8	.249	3/16	.125	1/4
A 9X15-0806					.188	
A 9X15-0808					.250	
A 9X15-0810					.313	
A 9X15-0812					.375	
A 9X15-0816					.500	
A 9X15-0820					.625	
A 9X15-0824					.750	
A 9X15-0832					1.000	
A 9X15-0840					1.250	
A 9X15-0848	1.500					